



# Cisco Webex Room Kit Plus Precision 60 Integrator Package

---

# Contents

Cisco Webex Room Kit Plus Precision 60 features and benefits	4
Cisco Webex registration	4
Product specifications	4
Ordering information	8
Warranty information	9
Cisco environmental sustainability	10
Cisco Services and Support	10
Cisco Capital	10
For more information	11

---

The Cisco Webex™ Room Kit Plus Precision 60 (Room Kit Plus P60) integrator package is a powerful collaboration solution that integrates with flat panel displays to bring more intelligence and versatility to your collaboration spaces. This package combines the performance of the Cisco Webex Room Kit Plus codec (Codec Plus) and the flexibility of the Cisco Precision 60 Camera to offer maximum flexibility in scenarios where you need special camera placement, objects close up, or wide pan/tilt/zoom capability.

### Package overview

The Room Kit Plus P60 integrator package delivers an unmatched audio and video experience that customers have come to expect from Cisco. In addition, the package provides flexibility for rooms that can benefit from a pan-tilt-zoom camera. The Precision 60 Camera not only delivers a premier imaging experience with 10x optical and 20x total zoom power, but also offers a high level of flexibility for custom and specialized integrations. The Precision 60 Camera also supports superior adaptability to light conditions and delivers one of the best image qualities in the industry for large meeting rooms.

The Room Kit Plus P60 integrator package is rich in functionality and experience but is priced and designed to be easily scalable to all of your collaboration spaces – whether registered on the premises or to Cisco Webex in the cloud.



**Figure 1.**  
Cisco Webex Room Kit Plus Precision 60 integrator package

## Cisco Webex Room Kit Plus Precision 60 features and benefits

Feature	Benefit
<b>Smart meetings</b>	<ul style="list-style-type: none"> <li>• Powerful imaging with one motorized high-quality camera (10x optical or 20x total zoom)</li> <li>• Easily controlled by the Cisco Webex Room Navigator control unit or with a Cisco Webex app-enabled device</li> <li>• End-to-end security</li> </ul>
<b>Smart presentations</b>	<ul style="list-style-type: none"> <li>• Supports dual screens for video and content</li> <li>• Supports dual content sources for local meetings</li> <li>• 4K content sharing (local 30 fps, remote 5 fps)</li> <li>• Wired or wireless content sharing</li> </ul>
<b>Smart integrations</b>	<ul style="list-style-type: none"> <li>• Automatic screen and display integration through HDMI Consumer Electronics Control (CEC)</li> <li>• Supports Wi-Fi</li> <li>• In-room control: Control peripherals such as lights and blinds through the Cisco Webex Room Navigator</li> </ul>
<b>Built for cloud and premises</b>	<ul style="list-style-type: none"> <li>• Flexibility to register on the premises or to Cisco Webex in the cloud</li> <li>• Hardware is optimized to run on a cloud platform, for great experiences in shared rooms and spaces with easy access to hosted conferences</li> </ul>

## Cisco Webex registration

License level	Term
<b>Cisco Device Subscription</b>	Monthly or 1-, 2-, 3-, 4-, or 5-year options

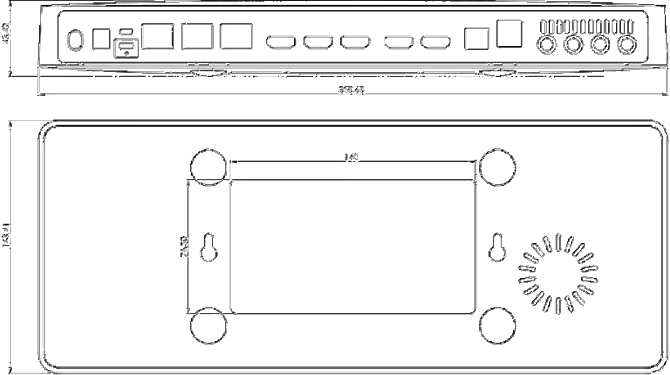
## Product specifications

**Table 1.** Specifications

Specification	Description
<b>Software compatibility</b>	<ul style="list-style-type: none"> <li>• Cisco Collaboration Endpoint Software Version 9.14.5 or later, or Cisco Webex RoomOS</li> </ul>
<b>Default components in Cisco Webex Room Kit Plus Precision 60</b>	<ul style="list-style-type: none"> <li>• Cisco Webex Codec Plus</li> <li>• Cisco Precision 60 Camera</li> <li>• Cisco Webex Room Navigator control unit</li> </ul>
<b>Optional hardware components</b>	<ul style="list-style-type: none"> <li>• Cisco Table Microphone 20, wall mount for Codec Plus, cables</li> </ul>
<b>Bandwidth</b>	<ul style="list-style-type: none"> <li>• Up to 6 Mbps point-to-point</li> </ul>
<b>Minimum bandwidth for resolution/frame rate</b>	H.264 <ul style="list-style-type: none"> <li>• 720p30 from 768 kbps</li> <li>• 720p60 from 1152 kbps</li> <li>• 1080p30 from 1472 kbps</li> <li>• 1080p60 from 2560 kbps</li> </ul>
<b>Firewall traversal</b>	<ul style="list-style-type: none"> <li>• Cisco Expressway™ technology</li> <li>• H.460.18, H.460.19 firewall traversal</li> </ul>

Specification	Description
<b>Video standards</b>	<ul style="list-style-type: none"> <li>• H.264, H.265</li> </ul>
<b>Video inputs</b>	<ul style="list-style-type: none"> <li>• One HDMI input supports formats up to maximum 1080p60</li> <li>• Two HDMI inputs support formats up to maximum 4K (3840 x 2160) at 30 fps including HD1080p60</li> <li>• Consumer Electronics Control (CEC) 2.0</li> </ul>
<b>Video outputs</b>	<ul style="list-style-type: none"> <li>• Two HDMI outputs support formats up to 3840 x 2160p60 (4Kp60)</li> <li>• Live video resolutions (encode and decode) up to 1920 x 1080p60 (HD1080p)</li> <li>• CEC 2.0</li> </ul>
<b>Audio standards</b>	<ul style="list-style-type: none"> <li>• G.711, G.722, G.722.1, G.729, AAC-LD, and Opus</li> </ul>
<b>Audio features</b>	<ul style="list-style-type: none"> <li>• High-quality 20-kHz audio</li> <li>• Subwoofer line out</li> <li>• Prepared for inductive loop (line out)</li> <li>• Automatic Gain Control (AGC)</li> <li>• Automatic noise reduction</li> <li>• Active lip synchronization</li> </ul>
<b>Audio inputs</b>	<ul style="list-style-type: none"> <li>• Three microphones, 4-pin mini-jack</li> <li>• Two audio in from HDMI</li> </ul>
<b>Audio outputs (external)</b>	<ul style="list-style-type: none"> <li>• 1 line out mini-jack (stereo) (Codec Plus)</li> <li>• 1 RCA output for subwoofer</li> <li>• 1 HDMI outputs</li> <li>• HDMI input #1 supports Audio Return Channel (ARC): Audio output to Quad Camera speakers</li> </ul>
<b>Dual stream</b>	<ul style="list-style-type: none"> <li>• H.239 (H.323) dual stream</li> <li>• Binary Floor Control Protocol (BFCP) (Session Initiation Protocol [SIP]) dual stream</li> <li>• Supports resolutions up to 3840 x 2160p5 (4Kp5) and 1080p30</li> </ul>
<b>Wireless sharing</b>	<ul style="list-style-type: none"> <li>• Cisco Webex client (up to 3840 x 2160p5)</li> <li>• Cisco Intelligent Proximity client (up to 1920 x 1080p5)</li> </ul>
<b>Multipoint support</b>	<ul style="list-style-type: none"> <li>• 4-way embedded SIP/H.323 conferencing capability with MultiSite option</li> </ul>
<b>MultiSite features (embedded multipoint) (optional upgrade)</b>	<ul style="list-style-type: none"> <li>• Adaptive SIP/H.323 MultiSite <ul style="list-style-type: none"> <li>◦ 3-way resolution up to 1080p30 + content up to 4Kp5</li> <li>◦ 4-way resolution up to 720p30 + content up to 4Kp5</li> </ul> </li> <li>• Full individual audio and video transcoding</li> <li>• H.323/SIP/VoIP in the same conference</li> <li>• Support for presentation (H.239/BFCP) from any participant at resolutions up to 3840 x 2160p5</li> <li>• Best Impression (automatic continuous presence layouts)</li> <li>• Encryption and dual stream from any site</li> </ul>
<b>Protocols</b>	<ul style="list-style-type: none"> <li>• H.323</li> <li>• SIP</li> <li>• Cisco Webex</li> </ul>
<b>Embedded encryption</b>	<ul style="list-style-type: none"> <li>• H.323 and SIP point-to-point</li> <li>• Standards based: H.235 v3 and Advanced Encryption Standard (AES)</li> <li>• Automatic key generation and exchange</li> </ul>

Specification	Description
<b>IP network features</b>	<ul style="list-style-type: none"> <li>• DNS lookup for service configuration</li> <li>• Differentiated services (DiffServ) (Quality of Service [QoS])</li> <li>• IP-adaptive bandwidth management (including flow control)</li> <li>• Automatic gatekeeper discovery</li> <li>• Dynamic playout and lip-sync buffering</li> <li>• H.245 Dual-Tone Multifrequency (DTMF) tones in H.323</li> <li>• RFC 4733 DTMF tones in SIP</li> <li>• Date and time support using Network Time Protocol (NTP)</li> <li>• Media adaption and resilience</li> <li>• Uniform Resource Identifier (URI) dialing</li> <li>• Dynamic Host Configuration Protocol (DHCP)</li> <li>• 802.1X network authentication</li> <li>• 802.1Q Virtual LAN</li> <li>• 802.1p (QoS and Class of Service [CoS])</li> </ul>
<b>Call control</b>	<ul style="list-style-type: none"> <li>• Native registration with Cisco Unified Communications Manager <ul style="list-style-type: none"> <li>◦ Requires CUCM Version 10.5.2 or later with device pack for Room Kit Plus</li> </ul> </li> <li>• Cisco Expressway <ul style="list-style-type: none"> <li>◦ Native registration with Expressway</li> </ul> </li> </ul>
<b>IPv6 network support</b>	<ul style="list-style-type: none"> <li>• Single call stack support for both H.323 and SIP</li> <li>• Dual-stack IPv4 and IPv6 for DHCP, Secure Shell (SSH), HTTP, HTTPS, DNS, DiffServ</li> <li>• Support for both static and automatic IP configuration (stateless address auto configuration)</li> </ul>
<b>Security features</b>	<ul style="list-style-type: none"> <li>• Management using HTTPS and SSH</li> <li>• IP administration password</li> <li>• Menu administration password</li> <li>• Disable IP services</li> <li>• Network settings protection</li> </ul>
<b>Certificate management</b>	<ul style="list-style-type: none"> <li>• Certificate Authority Proxy Function (CAPF) support for additional security</li> <li>• Manufacturer-Installed Certificates (MIC)</li> <li>• Locally Significant Certificates (LSC)</li> <li>• X.509 Digital Certificates (DER encoded binary); both DER and Base-64 formats are acceptable for the client and server certificates; certificates with a key size of 1024, 2048, and 4096 are supported</li> </ul>
<b>Network interfaces codec medium</b>	<ul style="list-style-type: none"> <li>• One Ethernet (RJ-45) 10/100/1000 for LAN</li> <li>• One Ethernet (RJ-45) 10/100/1000 for direct pairing with camera</li> <li>• One Ethernet (RJ-45) 10/100/1000 with Power over Ethernet (PoE) for direct pairing with Touch 10</li> <li>• Wi-Fi 802.11a/b/g/n/ac 2.4 GHz/5 GHz for LAN. 2x2 MIMO</li> </ul> <p>Note: Due to compliance regulations, it is required that 802.11d is enabled in the access point for the product to operate properly within 5725 MHz – 5875 MHz.</p> <p>Using a Wifi connection is a flexible option, however an Ethernet connection is always preferred for high performance.</p>

Specification	Description
<b>Other interfaces</b>	<ul style="list-style-type: none"> <li>• USB 2.0 port, uUSB, factory reset pinhole</li> </ul>
<b>Power supplies (2)</b>	<ul style="list-style-type: none"> <li>• 100 to 240VAC, 50/60 Hz, 12VDC input</li> <li>• Average 20W, peak 70W</li> </ul>
<b>Operating temperature and humidity</b>	<ul style="list-style-type: none"> <li>• 0° C to 35° C (32° F to 95° F) ambient temperature</li> <li>• 10% to 90% Relative Humidity (RH)</li> </ul>
<b>Storage and transport temperature</b>	<ul style="list-style-type: none"> <li>• -20° C to 60° C (-4° F to 140° F) at 10% to 90% RH (noncondensing)</li> </ul>
<b>Locking mechanism</b>	<ul style="list-style-type: none"> <li>• Kensington security lock</li> </ul>
<b>Dimensions</b>	 <ul style="list-style-type: none"> <li>• Codec Plus: <ul style="list-style-type: none"> <li>◦ Width: 14.1 in. (35.9 cm)</li> <li>◦ Height: 1.7 in. (4.3 cm)</li> <li>◦ Depth: 5.6 in. (14.3 cm)</li> <li>◦ Weight: 3.9 lb. (1.77 kg)</li> </ul> </li> <li>• Precision 60 Camera: <ul style="list-style-type: none"> <li>◦ Length: 10.6 in. (26.8 cm)</li> <li>◦ Height (at max. tilt): 7.1 in (18 cm)</li> <li>◦ Depth: 6.4 in. (16.3 cm)</li> <li>◦ Weight: 5.5 lb. (2.5 kg)</li> </ul> </li> </ul>
<b>Camera overview</b>	<ul style="list-style-type: none"> <li>• 1920 x 1080 at 60 fps resolution</li> <li>• Zoom <ul style="list-style-type: none"> <li>◦ 10x optical zoom</li> <li>◦ 2x digital zoom</li> <li>◦ 20x total zoom</li> </ul> </li> <li>• Pan and tilt <ul style="list-style-type: none"> <li>◦ Pan range: +/- 100 degrees</li> <li>◦ Tilt range: +/- 20 degrees</li> </ul> </li> <li>• Field of view (FoV) <ul style="list-style-type: none"> <li>◦ Horizontal FoV: 80 degrees</li> <li>◦ Vertical FoV: 48.8 degrees</li> </ul> </li> <li>• 1.0 m to infinity (wide) focus distance</li> <li>• F-value: 1.5</li> <li>• Camera control: Ethernet</li> <li>• Focus, white balance, and brightness: Automatic or manual</li> </ul>

Specification	Description
	<ul style="list-style-type: none"> <li>• Video interfaces               <ul style="list-style-type: none"> <li>◦ HDMI 1.4</li> <li>◦ 3G-SDI</li> </ul> </li> <li>• Power               <ul style="list-style-type: none"> <li>◦ 12V/3A</li> <li>◦ 100-120/200-240VAC, 50/60 Hz</li> </ul> </li> </ul> <p>Network interfaces: One LAN/Ethernet (RJ-45) 10/100 Mbit</p>

## Regulatory compliance

- Directive 2014/35/EU (Low-Voltage Directive)
- Directive 2014/30/EU (EMC Directive) – Class A
- Directive 2014/53/EU (Radio Equipment Directive)
- Directive 2011/65/EU (RoHS)
- Directive 2002/96/EC (WEEE)
- NRTL approved (Product Safety)
- FCC CFR 47 Part 15B (EMC) – Class A

Please check the Product Approval Status Database at <https://www.ciscofax.com/> for approval documents per country.

## Ordering information

To place an order, please contact your local Cisco representative and refer to Table 2.

**Table 2.** Ordering information

Product name	Part number	Compliance model number
<b>Cisco Webex Room Kit Plus Precision 60 - Upfront pricing (GPL*)</b> <ul style="list-style-type: none"> <li>• Cisco Webex Codec Plus</li> <li>• Cisco Webex Room Navigator Control Unit</li> <li>• Cisco Precision 60 Camera</li> </ul>	CS-KITP60-K9 CS-CODEC-PLUS+ CS-T10-TS-K9 CTS-CAM-P60+	TTC7-25 TTC5-015 TTC8-07
<b>Cisco Webex Room Kit Plus Precision 60 - NO RADIO</b> <ul style="list-style-type: none"> <li>• Cisco Webex Codec Plus - NO RADIO</li> <li>• Cisco Webex Room Navigator Control Unit</li> <li>• Cisco Precision 60 Camera</li> </ul>	CS-KITP60-NR-K9 CS-T10-TS-K9 CTS-CTRL-DVX-10 CTS-CAM-P60+	TTC5-015 TTC5-09 TTC8-07
<b>Cisco Webex Room Kit Plus Precision 60 - NO CRYPTO</b> <ul style="list-style-type: none"> <li>• Cisco Webex Codec Plus</li> <li>• Cisco Webex Room Navigator Control Unit</li> <li>• Cisco Precision 60 Camera</li> </ul>	CS-KITP60-K7 CS-T10-TS-K9 CTS-CTRL-DVX-10 CTS-CAM-P60+	TTC5-015 TTC5-09 TTC8-07



Product name	Part number	Compliance model number
<b>Cisco Webex Room Kit Plus Precision 60 - TAA compliant</b> <ul style="list-style-type: none"> <li>• Cisco Webex Codec Plus - TAA, NO RADIO, or</li> <li>• Cisco Webex Codec Plus - TAA</li> <li>• Cisco Webex Room Navigator Control Unit</li> <li>• Cisco Precision 60 Camera</li> </ul>	CS-KITP60-K9++ CS-CODEC-PLUS-NR++ CS-T10-TS-K9 CTS-CTRL-DVX-10 CTS-CAM-P60+	TTC7-25 TTC5-015 TTC5-09 TTC8-07
<b>Options</b>		
<b>Cisco Table Microphone 20</b>	CTS-MIC-TABL20	
<b>Extension cable for Table Microphone 20</b>	CAB-MIC-T20EXT	
<b>Cisco Ceiling Microphone</b>	CTS-MIC-CLNG-G2	
<b>Shielded cable for ceiling mic (non-plenum rated)</b>	CAB-ETHRSHLD-10M	
<b>Wall mount kit for Codec Plus</b>	CS-KITPLUS-WMK	
<b>8 m HDMI 2.0 certified cable</b>	CAB-PRES-2HDMI-GR	
<b>HDMI 2.0 cable 1.5 m/5 ft, gray</b>	CAB-2HDMI-1.5M-GR	
<b>HDMI 2.0 cable 3 m/10 ft, gray</b>	CAB-2HDMI-3M-GR	
<b>Ethernet cable 1.5 m/5 ft, gray</b>	CAB-ETH-1.5M-GR	
<b>Ethernet cable 3 m/10 ft, gray</b>	CAB-ETH-3M-GR	
<b>Ethernet cable 5 m/16.4 ft, gray</b>	CAB-ETH-5M-GR	
<b>Software options - ordered separately</b>		
<b>Remote Monitoring</b>	L-ROOM-RM (L-TP-RM)	
<b>MultiSite (embedded multipoint)</b>	L-KITPLUS-MS (L-ROOM-PAK)	
<b>Spares</b>		
<b>Cisco Webex Codec Plus</b>	CS-CODEC-PLUS=	TTC7-25
<b>Cisco Webex Codec Plus - no radio, no crypto</b>	CS-CODEC-PL-NR-K7=	TTC7-25
<b>Cisco Webex Codec Plus - no radio</b>	CS-CODEC-PLUS-NR=	TTC7-25
<b>Power supply 12VDC 70W</b>	PSU-12VDC-70W-GR=	
<b>Cisco Precision 60 Camera</b>	CTS-CAM-P60=	TTC8-07

\*\* GPL = Global Price List

## Warranty information

Cisco Webex Room Kit Plus Precision 60 Integrator Package has a 90-day limited liability warranty.

## Cisco environmental sustainability

Information about Cisco's environmental sustainability policies and initiatives for our products, solutions, operations, and extended operations or supply chain is provided in the "Environment Sustainability" section of Cisco's [Corporate Social Responsibility](#) (CSR) Report.

Reference links to information about key environmental sustainability topics (mentioned in the "Environment Sustainability" section of the CSR Report) are provided in the following table:

Sustainability topic	Reference
Information on product material content laws and regulations	<a href="#">Materials</a>
Information on electronic waste laws and regulations, including products, batteries, and packaging	<a href="#">WEEE compliance</a>

Cisco makes the packaging data available for informational purposes only. It may not reflect the most current legal developments, and Cisco does not represent, warrant, or guarantee that it is complete, accurate, or up to date. This information is subject to change without notice.

## Cisco Services and Support

Cisco and our partners provide a broad portfolio of smart, personalized services and support that can help you realize the full business value of your Cisco collaboration investment by increasing business agility and network availability. This portfolio of services accelerates business innovation by harnessing the network as a powerful business platform. For more information about these services, please visit <https://www.cisco.com/go/collaborationservices>.

## Cisco Capital

### **Flexible payment solutions to help you achieve your objectives.**

Cisco Capital makes it easier to get the right technology to achieve your objectives, enable business transformation and help you stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services and complementary third-party equipment in easy, predictable payments. [Learn more](#).

---

## For more information

- Learn more about [Cisco Webex Room Kit Plus](#).
- Learn more about [Cisco Precision Cameras](#).
- Download the [Cisco Webex app](#).

**Americas Headquarters**  
Cisco Systems, Inc.  
San Jose, CA

**Asia Pacific Headquarters**  
Cisco Systems (USA) Pte. Ltd.  
Singapore

**Europe Headquarters**  
Cisco Systems International BV Amsterdam,  
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)