

SOPHOS

# Sophos Firewall

## Powerful Protection and Performance

Sophos Firewall and XGS Series appliances with dedicated Xstream Flow Processors enable the ultimate in application acceleration, high-performance TLS inspection, and powerful threat protection.



## Powerful Protection and Performance

The Sophos Firewall Xstream architecture is engineered to deliver high levels of visibility, protection, and performance to address some of the greatest challenges facing network administrators today.

### TLS 1.3 Inspection

Approximately 99% of web traffic is now encrypted, making it invisible to most firewalls. Many organizations find themselves powerless to protect their networks from an increasing amount of ransomware, threats, and potentially unwanted apps that are exploiting this blind spot.

Sophos Firewall makes efficient and effective TLS inspection possible without compromising on performance. Our XGS Series appliances with integrated Xstream Flow Processors put TLS traffic on the FastPath for accelerated inspection. Our high-performance TLS inspection engine supports TLS 1.3 without downgrading, the latest cipher suites for maximum compatibility, and enhanced visibility into encrypted traffic flows right on the dashboard.

### Deep Packet Inspection

We believe you should never have to decide between security and performance. Sophos Firewall includes a high-speed deep packet inspection (DPI) engine to scan your traffic for threats without a proxy slowing down the process. The firewall stack can completely offload the processing to the DPI engine, significantly reducing latency and improving overall efficiency.

Sophos Firewall blocks the latest ransomware and breaches with high-performance streaming DPI, including next-gen IPS, web protection, and app control, as well as deep learning and sandboxing powered by SophosLabs Intelix.

### Application Acceleration


A significant portion of your network traffic is trusted business application traffic destined for branch offices, remote users, or cloud application servers. As such, no additional security scanning for threats or malware is needed, and traffic can be intelligently directed to the FastPath. This reduces latency, optimizes overall performance, and frees up capacity for traffic that does need deep packet inspection.

Sophos Firewall accelerates your SaaS, SD-WAN, and cloud traffic such as VoIP, video, and other trusted applications automatically or via your policies – putting them on the FastPath through the Xstream Flow Processor.

### SD-WAN

Managing application traffic routing over multiple WAN links and interconnecting a distributed network are essential elements of any SD-WAN solution. Oftentimes, these tasks are much more challenging than they should be.

Sophos Firewall with Xstream SD-WAN provides a powerful, integrated SD-WAN solution, with performance-based link selection and routing, load balancing, zero-impact transitions between links in the event of a disruption, central cloud-managed orchestration, and Xstream FastPath acceleration of VPN tunnel traffic. Sophos Firewall with Xstream SD-WAN is one of the best, most flexible SD-WAN solutions available in any firewall today.

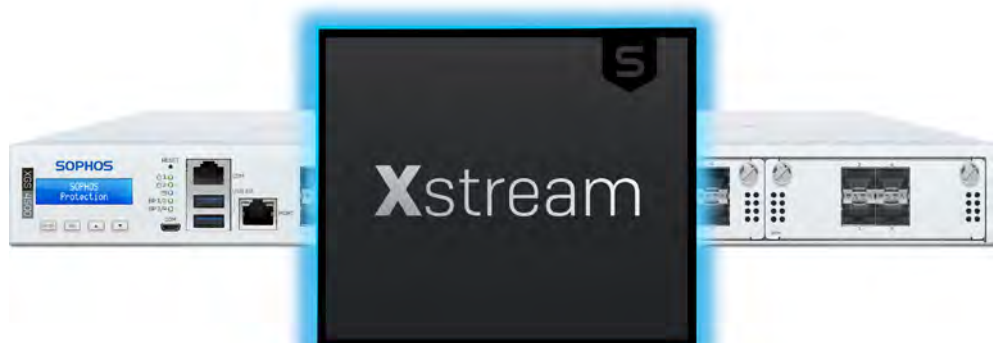

## Sophos Central

Sophos Central is the ultimate cybersecurity cloud management platform to manage your firewalls and your full portfolio of Sophos security solutions.

### Central Management




### Simply Manage Multiple Firewalls

Sophos Central makes day-to-day setup, monitoring, and management of your Sophos Firewall easy. It also provides helpful features such as alerting, backup management, one-click firmware updates, and rapid provisioning of new firewalls.

- ▶ Manage all of your Sophos Firewalls and other Sophos products from a single console
- ▶ Configure changes and apply them to a group of firewalls or manage each firewall individually
- ▶ Create a backup schedule and store up to five backups in the cloud
- ▶ Schedule firmware updates across your entire network with just a few clicks

Central Management is available at no extra cost.

### Central Reporting

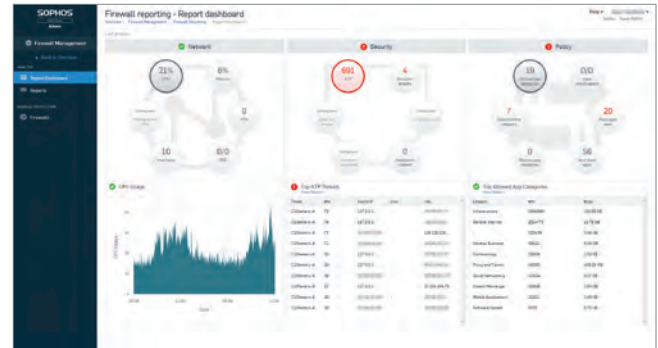

### Firewall Reporting in the Cloud

Sophos Central includes powerful reporting tools that enable you to visualize your network, web, application activity, and security over time. You get flexible reporting that combines a variety of built-in reports with powerful tools that you can use to create your own custom reports, enabling you to report what you want, how you want.

- ▶ Increase your visibility into network activity through analytics
- ▶ Analyze data to identify security gaps, suspicious user behavior, or other events requiring policy changes
- ▶ Use the pre-defined modules or customize each report for specific use cases

Central Reporting is available at no extra cost for the storage of up to seven days of report data. Premium options with longer data retention and additional features are available for optional purchase, either individually or as part of other subscriptions/bundles.

### Zero-Touch Deployment

Zero-touch deployment enables the initial configuration to be performed in Sophos Central and exported for loading onto the device from a flash drive at startup, automatically connecting the device back to Sophos Central.

### SD-WAN Orchestration

Sophos Central makes interconnecting SD-WAN overlay networks between multiple Sophos Firewalls quick and easy. With just a few clicks, you can setup a full mesh network, hub-and-spoke topology, or something in-between, and Sophos Central will automatically configure all of the necessary VPN tunnel and firewall access rules to enable your SD-WAN network.

Learn more about the Sophos Central Ecosystem at [sophos.com/firewall-central](https://sophos.com/firewall-central).

## Synchronized Security

### Active Threat Response


Sophos Firewall is uniquely integrated with other Sophos products and services to constantly share threat, application, and user information across products to provide enhanced detection and automatic response to active threats. When a threat or indicator of compromise is detected, Sophos Firewall automatically coordinates a response with endpoints, wireless, ZTNA, email, and other Sophos solutions to stop threats dead in their tracks. Dynamic firewall rules ensure that compromised devices are unable to communicate with command-and-control servers or move around the network.

Sophos Synchronized Security also integrates with Sophos MDR and XDR, enabling analysts to provide real-time active threat feed information to the firewall for automatic response to active threats, dramatically reducing response time.

### Lateral Movement Protection

Lateral Movement Protection automatically isolates compromised systems at every point in a network to stop attacks. Healthy endpoints assist by ignoring all traffic from unhealthy endpoints, enabling complete isolation, even on the same network segment, to prevent threats and active adversaries from spreading or stealing data.

#### What Next-Gen Firewalls See Today



You can't control what you can't see. All firewalls today depend on static application signatures to identify apps. But those don't work for most custom, obscure, and evasive apps or any apps using generic HTTP or HTTPS.

#### What Sophos Firewall Sees

Sophos Firewall uses Synchronized Security to automatically identify, classify, and control all unknown applications, easily blocking the apps you don't want and prioritizing the ones you do.

### Synchronized Application Control

Synchronized Application Control utilizes Security Heartbeat connections with Sophos endpoints to automatically identify, classify, and control application traffic. All encrypted, custom, evasive, and generic HTTP or HTTPS applications that are currently unidentified will be revealed.

### Synchronized User ID

User authentication is critically important in a next-generation firewall but often challenging to implement in a seamless and transparent way. Synchronized User ID eliminates the need for client or server authentication agents by sharing the user identity between an endpoint and the firewall through Security Heartbeat.

### Synchronized SD-WAN: Powerful, Reliable Application Routing

Synchronized SD-WAN harnesses the power of Synchronized Security to optimize WAN path selection for your important business applications.

With Synchronized Application Control, discovered applications, that would otherwise be unknown, can be used for traffic-matching criteria in SD-WAN routing policies. This is yet another way that Synchronized Security can improve the efficiency of your network.

## Powerful Protection

### See it. Stop it. Secure it.

Our comprehensive next-generation firewall protection has been built to expose hidden risks, block both known and unknown threats, and automatically respond to incidents.




#### Exposes hidden risks

Superior visibility into unknown applications, risky activity, suspicious traffic, and advanced threats helps you regain control of your network and get deep insights.



#### Blocks unknown threats

Powerful next-gen protection technologies like deep learning and intrusion prevention keep your organization safe from the latest hacks and attacks.



#### Automatically responds to incidents

Synchronized Security's automatic threat response instantly identifies and isolates compromised systems on your network to prevent breaches and lateral movement.

### Sophos Managed Detection and Response

More customers trust Sophos for MDR than any other vendor. Using your Sophos Firewall in combination with Sophos MDR and Sophos Endpoint Protection gives you unmatched protection and more efficient remediation.

Find out more at: [sophos.com/mdr](https://sophos.com/mdr)



Sophos offers the full network stack managed from a single console: firewalls, switches, and access points.

## Xstream Protection: A Single Bundle for Ultimate Protection

All the next-gen protection, performance, and value you need to power even the most demanding networks. Also available with the XGS Series model of your choice included.



### Base Firewall Features

- ▶ **Networking and SD-WAN:** Wireless, SD-WAN, application-aware routing, traffic shaping
- ▶ **Protection and Performance:** Xstream Architecture with Network Flow FastPath, TLS 1.3 inspection, Deep-Packet Inspection
- ▶ **SD-WAN and VPN:** Xstream SD-WAN, IPsec/SSL site-to-site and remote access VPN (unlimited), SD-RED site-to-site
- ▶ **Reporting:** Historical on-box logging and reporting, Sophos Central cloud reporting (seven-day data retention)



### Network Protection

- ▶ **Xstream TLS Inspection:** TLS 1.3 inspection with pre-packaged exceptions
- ▶ **Xstream DPI engine:** Streaming deep packet inspection
- ▶ **IPS:** Next-gen Intrusion Prevention
- ▶ **ATP:** Advanced Threat Protection
- ▶ **Synchronized Security Heartbeat:** Integration with Sophos endpoints to identify and isolate threats
- ▶ **Clientless VPN:** HTML5
- ▶ **SD-RED VPN:** Manage SD-RED devices
- ▶ **Reporting:** Extensive network and threat reporting



### Web Protection

- ▶ **Xstream TLS Inspection:** TLS 1.3 inspection with pre-packaged exceptions
- ▶ **Xstream DPI engine:** Streaming deep packet inspection
- ▶ **Web Control:** By user, group, category, URL, keyword
- ▶ **Web Threat Protection:** Malware, PUA, malicious JavaScript, phishing
- ▶ **App Control:** By user, group, category, risk, and more
- ▶ **Synchronized App Control:** Integration with Sophos endpoints to identify unknown apps
- ▶ **Synchronized SD-WAN:** Utilizing Synchronized App Control to route unknown apps
- ▶ **Reporting:** Extensive web and app reporting



### Zero-Day Protection

- ▶ **Xstream TLS Inspection:** TLS 1.3 inspection with pre-packaged exceptions
- ▶ **Xstream DPI engine:** Streaming deep packet inspection
- ▶ **Zero-Day Threat Protection:** Analyze all unknown files using AI, ML, and sandboxing
- ▶ **Powered by SophosLabs Intelix:** Cloud-based intelligence and analysis
- ▶ **Machine Learning:** Using multiple deep learning models
- ▶ **Cloud Sandboxing:** Dynamic runtime analysis of unknown files
- ▶ **Reporting:** Extensive threat intelligence analysis reporting



### Sophos Central Management

- ▶ **Group Firewall Management:** Synchronized policy across firewall groups
- ▶ **Backup and firmware updates:** Storage and scheduling
- ▶ **Zero-touch deployment:** For new firewalls from the cloud



### Sophos Central Orchestration

- ▶ **SD-WAN Orchestration:** Point-and click site-to-site VPN orchestration
- ▶ **Cloud Firewall Reporting:** Multi-firewall reporting, save, schedule and export reports (30-day data retention)
- ▶ **XDR and MDR Connector:** Support for XDR and MDR services

### Enhanced Support



## All Licensing Options

We recommend the Xstream Protection bundle for the ultimate in security. If you prefer to customize your protection, all subscriptions are also available for individual purchase.

| <b>Xstream Protection Bundle:</b> |  |
|-----------------------------------|--|
| <b>Base License</b>               | Networking, wireless, Xstream Architecture, unlimited remote access VPN, site-to-site VPN, reporting |
| <b>Network Protection</b>         | Xstream TLS and DPI engine, IPS, ATP, Security Heartbeat, manage SD-RED, reporting                   |
| <b>Web Protection</b>             | Xstream TLS and DPI engine, web security and control, application control, reporting                 |
| <b>Zero-Day Protection</b>        | Machine learning and sandboxing file analysis, reporting   |
| <b>Central Orchestration</b>      | SD-WAN VPN orchestration, Central Firewall Advanced Reporting (30-days), MDR/XDR connector           |
| <b>Enhanced Support</b>           | 24/7 support, feature updates, advanced replacement hardware warranty for term                       |

**Custom Protection:** You can choose the Standard Protection bundle or purchase any of the protection modules separately.

| <b>Standard Protection Bundle:</b> |   |
|------------------------------------|---|
| <b>Base License</b>                | Networking, wireless, Xstream Architecture, Xstream SD-WAN, unlimited remote access VPN, site-to-site VPN |
| <b>Network Protection</b>          | Xstream TLS and DPI engine, IPS, ATP, Security Heartbeat, manage SD-RED, reporting                        |
| <b>Web Protection</b>              | Xstream TLS and DPI engine, web security and control, application control, reporting                      |
| <b>Enhanced Support</b>            | 24/7 support, feature updates, advanced replacement hardware warranty for term                            |

| <b>Additional Protection Modules:</b> |                                      |
|---------------------------------------|--------------------------------------|
| <b>Email Protection</b>               | On-box antispam, AV, DLP, encryption |
| <b>Web Server Protection</b>          | Web Application Firewall             |

### Sophos Central Management and Reporting:

| <b>Sophos Central Management and Reporting (included at no charge):</b> |  |
|---|--|
| <b>Sophos Central Management</b>  | Group firewall management, backup management, firmware update scheduling   |
| <b>Sophos Central Firewall Reporting</b>                                | Pre-packaged and custom report tools, with seven days cloud storage for no extra charge [see <a href="#">other options</a> ] |

### Additional Protection:

| <b>Additional Protection Services, Products, and Modules:</b> |  |
|---|--|
| <b>Managed Detection and Response</b>                         | 24/7 threat hunting, detection, and response delivered by an expert team [ <a href="#">more info</a> ] |
| <b>Sophos Intercept X Endpoint with XDR</b>                   | Sophos Central managed next-gen endpoint protection with EDR [ <a href="#">more info</a> ]             |
| <b>Zero Trust Network Access</b>                              | A ZTNA gateway is integrated into your firewall. [ <a href="#">more info</a> ]                         |
| <b>Central Email Advanced</b>                                 | Sophos Central managed antispam, AV, DLP, encryption [ <a href="#">more info</a> ]                     |
| <b>Sophos Switch</b>  | Cloud-managed access layer switches [ <a href="#">more info</a> ]                                      |
| <b>Sophos Wireless</b>  | Scalable, cloud-managed Wi-Fi [ <a href="#">more info</a> ]  |

**Support:** A support subscription is required to receive firmware upgrades. Enhanced support is included in all protection bundles, but you can upgrade to enhance your support experience further.

| <b>Additional Support Options:</b>   |   |
|--------------------------------------|---|
| <b>Enhanced Plus Support Upgrade</b> | Upgrade your support with VIP support, HW warranty for add-ons, TAM option (extra cost) |

### Cloud, Virtual, and Software Appliance Licensing Options:


If you're deploying Sophos Firewall in the cloud, in a virtual environment, or as software on your own hardware, the licensing guide below can help you find the right option.

| <b>Model</b>      | <b>Equivalent AWS instance</b> | <b>Equivalent Azure VM</b> | <b>Software/Virtual License*</b> |
|-------------------|--------------------------------|----------------------------|----------------------------------|
| <b>XGS 87(w)</b>  | t3.medium                      | -                          | 2C4                              |
| <b>XGS 107(w)</b> | c5.large                       | Standard_F2s_v2            | -                                |
| <b>XGS 116(w)</b> | -                              | -                          | 4C6                              |
| <b>XGS 2100</b>   | c5.xlarge                      | -                          | -                                |
| <b>XGS 2300</b>   | m5.xlarge                      | Standard_F4s_v2            | 6C8                              |
| <b>XGS 3100</b>   | c5.2xlarge                     | Standard_F8s_v2            | 8C16                             |
| <b>XGS 4300</b>   | c5.4xlarge                     | Standard_F16s_v2           | 16C24                            |
| <b>XGS 5500</b>   | c5.9xlarge                     | Standard_F32s_v2           | Unlimited                        |


\* Based upon CPU cores and RAM

For a complete list of features included in each protection subscription, see the [Sophos Firewall Feature List](#).


## Deployment Options




Purpose-built devices to provide the ultimate in performance.



Protect your network infrastructure in the AWS or Azure cloud.



Install on VMware, Citrix, Microsoft Hyper-V, and KVM.



Install the Sophos Firewall OS image on your own Intel hardware or server.

### Cloud

Sophos Firewall offers the best network visibility, protection, and response capabilities to secure your public, private, and hybrid cloud environments.



As an AWS Advanced Technology Partner, Sophos is a validated AWS Security Competency vendor, AWS Marketplace seller, and AWS Public Sector Partner.

Sophos Firewall is now available in the AWS Marketplace, with auto-scaling support with either a pay-as-you-go (PAYG) license model or bring your own license (BYOL) to best fit your needs.



Sophos Firewall is certified and optimized for Azure and is available in the Microsoft Azure Marketplace. Take advantage of the free test drive or the flexible PAYG or BYOL licensing options.



Sophos Firewall is Nutanix AHV and Nutanix Flow Ready, bringing the world's best next-gen firewall visibility, protection, and response to the industry's leading hyper-converged infrastructure (HCI) platform. Take advantage of a 30-day free trial using our KVM image and flexible licensing.

### Virtual and Software

Sophos Firewall supports a broad range of virtualization platforms and can also be deployed as a software appliance on your own x86 Intel hardware.



See the [Licensing section](#) for available licensing options.



## Protection Modules

You can choose from a number of modules to customize the protection offered by your firewall to your individual needs and deployment scenario.

### Base Firewall

The Sophos Firewall Base License includes the Xstream Architecture, networking, wireless, SD-WAN, VPN, and reporting.

#### Xstream Architecture

Enables high-performance TLS 1.3 inspection, deep packet inspection, and network flow FastPath to accelerate trusted SaaS, SD-WAN, and cloud application traffic. Note that Network and Web Protection are required to get the full benefits of the Xstream Architecture.

#### Xstream SD-WAN and Networking

Includes all networking, routing, and SD-WAN capabilities, including zone-based stateful firewall, NAT, VLAN, SD-WAN profiles, performance-based WAN link selection and monitoring, load balancing, zero-impact WAN link transitions, and Xstream FastPath acceleration of trusted application traffic, IPsec VPN traffic, and TLS encrypted traffic flows.

#### Secure Wireless

Built-in wireless controller for Sophos APX Wi-Fi 5 access points. Plug-and-play access point discovery makes setup easy. Support for multiple SSIDs, hotspots, guest networks, and diverse encryption and security standards.

Wi-Fi 6 support is available using our separate, cloud-managed Wi-Fi solution.

#### VPN

Provides standards-based site-to-site and remote access VPN (free up to the capacity of the firewall), with support for IPsec and SSL. Sophos Connect remote access VPN client for Windows and Macs offers seamless and easy deployment and configuration options. SD-RED layer 2 site-to-site tunnels offer a lightweight robust VPN alternative.

#### Reporting

Extensive on-box reporting provides valuable insights into threats, users, applications, web activity, and much more. Note that specific reporting functionality may be dependent on other protection modules to get the full benefits (for example, Web Protection or web and app reports).

The Base Firewall is included with every appliance.

### Network Protection

All the protection you need to stop sophisticated attacks and advanced threats while providing secure network access to those you trust.

#### Next-Gen Intrusion Prevention System

Provides advanced protection from all types of modern attacks. It goes beyond traditional server and network resources to protect users and apps on the network as well.

#### Security Heartbeat

Creates a link between your Sophos Central protected endpoints and your firewall to identify threats faster, simplify investigation, and minimize the impact of attacks. Easily incorporate the Security Heartbeat status into firewall policies to automatically isolate compromised systems.

#### Advanced Threat Protection

Instant identification and immediate response to today's most sophisticated attacks. Multi-layered protection identifies threats instantly, and Security Heartbeat provides an emergency response.

#### Advanced VPN Technologies

Adds unique and simple VPN technologies, including our clientless HTML5 self-service portal that makes remote access incredibly simple, plus management for our exclusive lightweight and secure SD-RED VPN technology.

Network Protection is included in the Xstream and Standard Protection bundles and is also available for separate purchase.

## Web Protection

Unmatched visibility and control over all of your users web and application activity.

### Powerful User and Group Web Policy

Provides enterprise-level Secure Web Gateway policy controls to easily manage sophisticated user and group web controls. Apply policies based on uploaded web keywords indicating inappropriate use or behavior.

### Application Control and QoS

Enables user-aware visibility and control over thousands of applications with granular policy and traffic-shaping (QoS) options based on application category, risk, and other characteristics. Synchronized Application Control automatically identifies all unknown, evasive, and custom applications on your network.

### Advanced Web Threat Protection

Backed by SophosLabs, our advanced engine provides the ultimate protection from today's polymorphic and obfuscated web threats. Innovative techniques like JavaScript emulation, behavioral analysis, and origin reputation help keep your network safe.

### High-Performance Traffic Scanning

Optimized for top performance, our Xstream SSL inspection provides ultra-low latency inspection and HTTPS scanning while maintaining performance.

Web Protection is included in the Xstream and Standard Protection bundles and is also available for separate purchase.

## Zero-Day Protection

AI-driven static and dynamic file analysis techniques combine to bring unprecedented threat intelligence to your firewall and effectively identify and block ransomware and other known and unknown threats.

### Powered by SophosLabs

Powered by the industry-leading SophosLabs, the Zero-Day Protection subscription includes a fully cloud-based threat intelligence and threat analysis platform. This provides deep learning-based file analysis, detailed analysis reporting, and a threat meter to show the risk summary for a file.

We use layers of analytics to identify known and potential threats, reduce unknowns, and derive verdicts and intelligence reports for the most commonly used file types.

### Static File Analysis

By harnessing the power of multiple machine learning models, global reputation, deep file scanning, and more, you can quickly identify threats without the need to execute files in real time.

### Dynamic File Analysis

Execute a file in a secure cloud-based sandbox to observe its behavior and intent. Screenshots provide added insights into any key events during the analysis.

### Threat Intelligence Analysis Reporting

Rich intelligence reports provide you with more than just a "good," "bad," or "unknown" verdict. Full insight into the nature and capabilities of a threat is delivered through the use of data science and SophosLabs research.

Zero-Day Protection is included in the Xstream Protection bundle and is also available for separate purchase.

## Central Orchestration

Sophos Central cloud-managed VPN orchestration, firewall reporting, and MDR/XDR integration.

### Sophos Central SD-WAN Orchestration

Makes VPN orchestration easy. Wizard-based tunnel configuration helps create full mesh networks, hub-and-spoke models, or complex tunnel setups between multiple firewalls a quick point-and-click exercise. Seamlessly integrates multiple WAN link and SD-WAN functionality and routing optimizations to improve resilience performance. Also integrates with user authentication and Synchronized Security Heartbeat to control access.

### Central Firewall Reporting Advanced (30 Days)

Cloud-based reporting with several pre-packaged common reports for threats, compliance, and user activity. Includes advanced options for creating custom reports and views with the option to save, schedule, or export your custom reports. Includes 30 days of log data retention with the option to add additional storage for more comprehensive historical reporting requirements.

### MDR/XDR Connector

Sophos MDR provides optional 24/7 threat hunting, detection, and response delivered by an expert team as a fully managed service. Sophos XDR offers extended detection and response managed by your team.

Regardless of whether you manage it yourself or Sophos manages it for you, your Sophos Firewall is ready to share the necessary threat intelligence and data to the cloud.

Central Orchestration is included in the Xstream Protection bundle and is available for separate purchase.

## Zero Trust Network Access

Provide secure remote access to applications and systems behind your firewall.

### Integrated ZTNA Gateway

Sophos Firewall provides an integrated Sophos ZTNA gateway at no extra cost. This simplifies ZTNA deployments by eliminating the need for a separate VM gateway, making deployments faster and easier. Sophos ZTNA is the ultimate remote access VPN replacement, providing better security, easier management, and a transparent user experience.

ZTNA gateways are available at no extra cost. User-based client licenses for ZTNA are sold separately.

## Email Protection

Consolidate your email protection with anti-spam, DLP, and encryption. We recommend Sophos Central Email Advanced for the best cloud-based email protection solution. If you require on-box email protection, this module offers essential anti-spam, DLP, and encryption.

### Integrated Message Transfer Agent

Ensures always-on business continuity for your email, allowing the firewall to automatically queue mail in the event that servers become unavailable.

### Live Anti-Spam

Provides protection from the latest spam campaigns, phishing attacks, and malicious attachments.

### Self-Serve Quarantine

Gives employees direct control over their spam quarantine, saving you time and effort.

### SPX Email Encryption

Unique to Sophos, SPX makes it easy to send encrypted emails to anyone, even those without any kind of trust infrastructure, using our patent-pending password-based encryption technology.

### Data Loss Prevention

Policy-based DLP can automatically trigger encryption or block/notify based on the presence of sensitive data in emails leaving the organization.

Email Protection is available for individual purchase only.

## Web Server Protection

Harden your web servers and business applications against hacking attempts and provide secure access.

### Business Application Policy Templates

Pre-defined policy templates let you protect common applications like Microsoft Exchange Outlook Anywhere or SharePoint quickly and easily.

### Protection from the Latest Hacks and Attacks

Offers a variety of advanced protection technologies, including URL and form hardening, deep-linking and directory traversal prevention, SQL injection and cross-site scripting protection, cookie signing, and more.

### Reverse Proxy

Authentication options, SSL offloading, and server load balancing ensure maximum protection and performance for your servers being accessed from the internet.

Web Server Protection is available for individual purchase only.

## Sophos XGS Series Appliances

All XGS Series firewall appliances are built on a dual-processor architecture, combining a high-performance, multi-core CPU with a dedicated Xstream Flow Processor for targeted acceleration at the hardware level. This gives you the flexibility and adaptability of an x86-based firewall plus a significant performance boost over legacy firewall designs.

### Product Matrix

| Model             |             | Tech Specs              |          |  | Throughput      |                  |                          |                        |
|-------------------|-------------|-------------------------|----------|--|-----------------|------------------|--------------------------|------------------------|
|                   | Form Factor | Ports/Slots [Max Ports] | w-model* | Swappable Components                             | Firewall [Mbps] | IPsec VPN [Mbps] | Threat Protection [Mbps] | Xstream SSL/TLS [Mbps] |
| <b>XGS 87(w)</b>  | Desktop     | 5/- (5)                 | Wi-Fi 5  | n/a  | 3,850           | 3,000            | 280                      | 375                    |
| <b>XGS 107(w)</b> | Desktop     | 9/- (9)                 | Wi-Fi 5  | Second power supply                              | 7,000           | 4,000            | 370                      | 420                    |
| <b>XGS 116(w)</b> | Desktop     | 9/1 (9)                 | Wi-Fi 5  | 2 <sup>nd</sup> power supply, 3G/4G, 5G, Wi-Fi** | 7,700           | 4,800            | 720                      | 650                    |
| <b>XGS 126(w)</b> | Desktop     | 14/1 (14)               | Wi-Fi 5  | 2 <sup>nd</sup> power supply, 3G/4G, 5G, Wi-Fi** | 10,500          | 5,500            | 900                      | 800                    |
| <b>XGS 136(w)</b> | Desktop     | 14/1 (14)               | Wi-Fi 5  | 2 <sup>nd</sup> power supply, 3G/4G, 5G, Wi-Fi** | 11,500          | 6,350            | 1,000                    | 950                    |
| <b>XGS 2100</b>   | 1U          | 10/1 (18)               | n/a      | Optional external power                          | 30,000          | 17,000           | 1,250                    | 1,100                  |
| <b>XGS 2300</b>   | 1U          | 10/1 (18)               | n/a      | Optional external power                          | 39,000          | 20,500           | 1,500                    | 1,450                  |
| <b>XGS 3100</b>   | 1U          | 12/1 (20)               | n/a      | Optional external power                          | 47,000          | 25,000           | 2,000                    | 2,470                  |
| <b>XGS 3300</b>   | 1U          | 12/1 (20)               | n/a      | Optional external power                          | 58,000          | 31,100           | 3,000                    | 3,130                  |
| <b>XGS 4300</b>   | 1U          | 12/2 (28)               | n/a      | Optional external power                          | 75,000          | 62,500           | 6,500                    | 8,000                  |
| <b>XGS 4500</b>   | 1U          | 12/2 (28)               | n/a      | Optional internal power                          | 80,000          | 75,550           | 8,650                    | 10,600                 |
| <b>XGS 5500</b>   | 2U          | 16/3 (48)               | n/a      | Power, SSD, Fan                                  | 100,000         | 92,500           | 14,000                   | 13,500                 |
| <b>XGS 6500</b>   | 2U          | 20/4 (68)               | n/a      | Power, SSD, Fan                                  | 120,000         | 109,800          | 17,850                   | 16,000                 |
| <b>XGS 7500</b>   | 2U          | 22/4 (70)               | n/a      | Power, SSD, Fan                                  | 160,000         | 117,000          | 26,000                   | 19,500                 |
| <b>XGS 8500</b>   | 2U          | 22/4 (70)               | n/a      | Power, SSD, Fan                                  | 190,000         | 141,000          | 34,000                   | 24,000                 |

\* 802.11ac

\*\* 2<sup>nd</sup> Wi-Fi module option for XGS 116w, 126w and 136w only

### Performance Test Methodology

**General:** Maximum throughput measured under ideal test conditions using industry-standard Keysight-Ixia BreakingPoint test tools. Actual performance may vary depending on network conditions and activated services.

- **Firewall:** Measured using HTTP traffic and 512 KB response size.
- **Firewall IMIX:** UDP throughput based on a combination of 66 byte, 570 byte, and 1518 byte packet sizes.
- **IPS:** Measured with IPS with HTTP traffic using default IPS ruleset and 512 KB object size.
- **IPsec VPN:** HTTP throughput using multiple tunnels and 512 KB HTTP response size.
- **TLS Inspection:** Performance measured with IPS with HTTPS sessions and different cipher suites.
- **Threat Protection:** Measured with Firewall, IPS, Application Control, and malware prevention enabled using HTTP 200 KB response size.
- **NGFW:** Measured with IPS and Application Control enabled with HTTP traffic using default IPS ruleset and 512KB object size.

### Need Sizing Help?

For further assistance in finding the right license or appliance for your needs, speak to your local Sophos sales team or partner. Sophos offers free sizing assistance and a Firewall Sizing Tool for partners via the Partner Portal.

## Sophos XGS Series Desktop: SMB and Branch Office

Customers looking for an all-in-one network security solution will appreciate the seamless connectivity options available for our Desktop appliances. With the modularity that small businesses, retail outlets, and branch offices need to grow and adapt to changing circumstances, these appliances offer the perfect balance between price and performance. All Desktop models are optionally available with built-in Wi-Fi.

All models are powered by a high-speed CPU plus a dedicated Xstream Flow Processor for hardware acceleration.

### Product Highlights

- ▶ Dual processor architecture for an excellent price-to-performance ratio
- ▶ Every model is available with optional integrated Wi-Fi for all-in-one connectivity
- ▶ An expansion bay on all XGS 116/126/136 models improves compatibility for 3G/4G and 5G when used with our optional modules
- ▶ An optional second Wi-Fi radio module can be added to w-models with an expansion bay
- ▶ Power-over-Ethernet ports built in on all XGS 116, 126, and 136 models (2.5GE on 136)
- ▶ A second power supply option for all XGS 1xx models offers a redundancy option not always seen in this form factor
- ▶ The SFP port on all models can be used for FTTH/FTTP or with the optional VDSL modem

**Note:** All protection features are supported on every XGS 1xx model and most on XGS 87 and 87w.

### Product Highlights

#### XGS 87 and XGS 87w

See detailed [technical specifications](#)

#### XGS 107, XGS 107w

See detailed [technical specifications](#)

#### XGS 116, XGS 116w


See detailed [technical specifications](#)

#### XGS 126, XGS 126w

See detailed [technical specifications](#)

#### XGS 136, XGS 136w

See detailed [technical specifications](#)

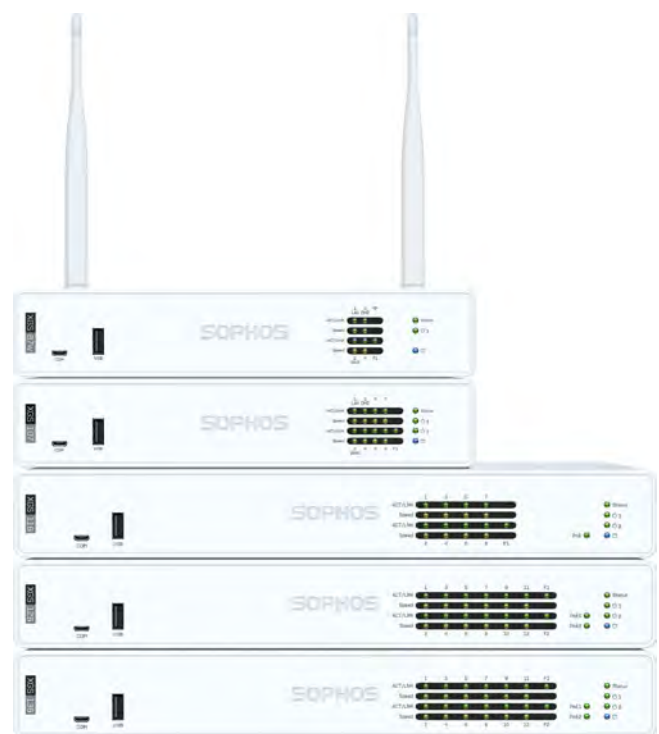

# Sophos XGS Series Desktop: SMB and Branch Office

## XGS 87 and XGS 87w


### Technical Specifications

**Note:** The XGS 87 and 87w do not support some advanced features like on-box reporting, dual AV scanning, WAF AV scanning, and the email message transfer agent (MTA) functionality. If you need these capabilities, the XGS 107(w) is recommended.

#### Front View



#### Back View

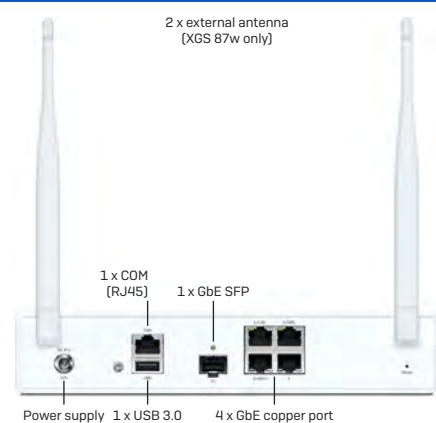

#### Physical Specifications

|  |   |
|--|---|
| <b>Mounting</b>                              | Rackmount kit available (to be ordered separately)                                |
| <b>Dimensions<br/>Width x Height x Depth</b> | 230 x 44 x 205.5 mm   |
| <b>Weight</b>                                | 1.36 kg/3 lbs (unpacked)<br>2.75 kg/6.06 lbs (packed)<br>(w-model minimally more) |

#### Environment

|                              |  |
|------------------------------|--|
| <b>Power supply</b>          | External auto-ranging AC-DC<br>100-240VAC, 1.7A@50-60 Hz<br>12VDC, 5A, 60W   |
| <b>Power consumption</b>     | 23.2 W / 79.16 BTU/hr [87] (idle)<br>27.1 W / 92.13 BTU/hr [87w] (idle)<br>43.4 W / 148.09 BTU/hr [87] (max.)<br>46.8 W / 159.69 BTU/hr [87w] (max.) |
| <b>Operating temperature</b> | 0°C to 40°C (operating)<br>-20°C to +70°C (storage)  |
| <b>Humidity</b>              | 10% to 90%, non-condensing   |

#### Product Certifications

|                       |   |
|-----------------------|---|
| <b>Certifications</b> | CB, CE, UKCA, UL, FCC, ISED, VCCI, CCC, KC*, BSMI, RCM, NOM, Anatel*, TEC |
|-----------------------|---|

\* XGS 87 only

| Performance                            | XGS 87(w)  |
|--|------------|
| Firewall throughput                    | 3,850 Mbps |
| Firewall IMIX                          | 3,000 Mbps |
| Firewall Latency (64 byte UDP)         | 6 μs       |
| IPS throughput                         | 1,200 Mbps |
| Threat Protection throughput           | 280 Mbps   |
| NGFW                                   | 700 Mbps   |
| Concurrent connections                 | 1,600,000  |
| New connections/sec                    | 35,700     |
| IPsec VPN throughput                   | 3,000 Mbps |
| IPsec VPN concurrent tunnels           | 500        |
| SSL VPN concurrent tunnels             | 500        |
| Xstream SSL/TLS Inspection             | 375 Mbps   |
| Xstream SSL/TLS concurrent connections | 8,192      |

Note: For performance testing methodology, see [page 11](#)

#### Wireless Specification (XGS 87w only)

|                           |                                    |
|---------------------------|------------------------------------|
| <b>No. of antennas</b>    | 2 external                         |
| <b>MIMO capabilities</b>  | 2 x 2:2                            |
| <b>Wireless interface</b> | 802.11a/b/g/n/ac (2.4 GHz / 5 GHz) |

#### Physical Interfaces

|                                     |   |
|-------------------------------------|---|
| <b>Storage</b>                      | 16 GB eMMC                                  |
| <b>Ethernet interfaces (fixed)</b>  | 4 x GbE copper<br>1 x SFP fiber*            |
| <b>Management ports</b>             | 1 x COM RJ45<br>1 x Micro-USB (cable incl.) |
| <b>Other I/O ports</b>              | 1 x USB 2.0 (front)<br>1 x USB 3.0 (rear)   |
| <b>Number of expansion slots</b>    | 0   |
| <b>Optional add-on connectivity</b> | SFP DSL module (VDSL2)<br>SFP transceivers  |

\* SFP transceivers sold separately



# Sophos XGS Series Desktop: SMB and Branch Office


## XGS 107, XGS 107w

### Technical Specifications

#### Front View



#### Back View

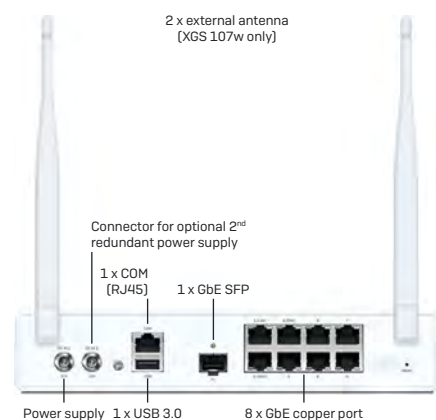

#### Physical Specifications

|  |  |
|--|--|
| <b>Mounting</b>                              | Rackmount kit available (to be ordered separately)                                 |
| <b>Dimensions<br/>Width x Height x Depth</b> | 230 x 44 x 205.5 mm  |
| <b>Weight</b>                                | 1.4 kg/3.09 lbs (unpacked)<br>2.8 kg/6.17 lbs (packed)<br>(w-model minimally more) |

#### Environment

|                              |   |
|------------------------------|---|
| <b>Power supply</b>          | External auto-ranging AC-DC<br>100-240VAC, 1.7A@50-60 Hz<br>12VDC, 5A, 60W<br>Optional second redundant power supply                          |
| <b>Power consumption</b>     | 107: 26.1 W/89.06 BTU/hr (idle)<br>107w: 29.8 W/101.68 BTU/hr (idle)<br>107: 53.9 W/183.91 BTU/hr (max.)<br>107w: 57.3 W/195.52 BTU/hr (max.) |
| <b>Operating temperature</b> | 0°C to 40°C (operating)<br>-20°C to +70°C (storage)   |
| <b>Humidity</b>              | 10% to 90%, non-condensing  |

#### Product Certifications

|                       |   |
|-----------------------|---|
| <b>Certifications</b> | CB, CE, UKCA, UL, FCC, ISED, VCCI, CCC, KC*, BSMI, RCM, NOM, Anatel*, TEC, SDPPI* |
|-----------------------|---|

\* XGS 107 only

| Performance                            | XGS 107(w) |
|--|------------|
| Firewall throughput                    | 7,000 Mbps |
| Firewall IMIX                          | 3,750 Mbps |
| Firewall Latency (64 byte UDP)         | 6 μs       |
| IPS throughput                         | 1,500 Mbps |
| Threat Protection throughput           | 370 Mbps   |
| NGFW                                   | 1,050 Mbps |
| Concurrent connections                 | 1,600,000  |
| New connections/sec                    | 44,400     |
| IPsec VPN throughput                   | 4,000 Mbps |
| SSL VPN concurrent tunnels             | 1,000      |
| IPsec VPN concurrent tunnels           | 1,000      |
| Xstream SSL/TLS Inspection             | 420 Mbps   |
| Xstream SSL/TLS concurrent connections | 8,192      |

Note: For performance testing methodology, see [page 11](#)

#### Wireless Specification (XGS 107w only)

|                           |                                    |
|---------------------------|------------------------------------|
| <b>No. of antennas</b>    | 2 external                         |
| <b>MIMO capabilities</b>  | 2 x 2:2                            |
| <b>Wireless interface</b> | 802.11a/b/g/n/ac (2.4 GHz / 5 GHz) |

#### Physical Interfaces

|  |   |
|--|---|
| <b>Storage (local quarantine/logs)</b> | Integrated 64 GB SSD                        |
| <b>Ethernet interfaces (fixed)</b>     | 8 x GbE copper<br>1 x SFP fiber*            |
| <b>Management ports</b>                | 1 x COM RJ45<br>1 x Micro-USB (cable incl.) |
| <b>Other I/O ports</b>                 | 1 x USB 2.0 (front)<br>1 x USB 3.0 (rear)   |
| <b>Number of expansion slots</b>       | 0   |
| <b>Optional add-on connectivity</b>    | SFP DSL module (VDSL2)<br>SFP transceivers  |

\* SFP transceivers sold separately

# Sophos XGS Series Desktop: SMB and Branch Office


## XGS 116, XGS 116w

### Technical Specifications

#### Front View



#### Back View

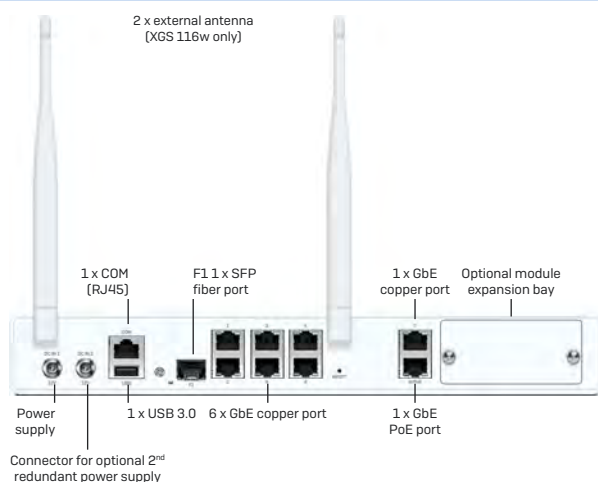

#### Physical Specifications

|  |  |
|--|--|
| <b>Mounting</b>                              | Rackmount kit available (to be ordered separately)                                   |
| <b>Dimensions<br/>Width x Height x Depth</b> | 320 x 44 x 213 mm  |
| <b>Weight</b>                                | 2.2 kg/4.85 lbs (unpacked)<br>4.2 kg/9.26 lbs (packed)<br>(w-model minimally higher) |

#### Environment

|                              |   |
|------------------------------|---|
| <b>Power supply</b>          | External auto-ranging AC-DC<br>100-240VAC, 2.5A@50-60 Hz<br>12VDC, 12.5A, 150W<br>Optional second redundant power supply  |
| <b>Power consumption</b>     | 116: 28 W/96 BTU/hr (idle)<br>116w: 30 W/102 BTU/hr (idle)<br>116: 57 W/195 BTU/hr (max.)<br>116w: 60 W/205 BTU/hr (max.) |
| <b>PoE addition enabled</b>  | 38 W/130 BTU/hr (max.)  |
| <b>Operating temperature</b> | 0°C to 40°C (operating)<br>-20°C to +70°C (storage)   |
| <b>Humidity</b>              | 10% to 90%, non-condensing  |

#### Product Certifications

|                       |   |
|-----------------------|---|
| <b>Certifications</b> | CB, CE, UKCA, UL, FCC, ISED, VCCI, CCC, KC*, BSMI, RCM, NOM, Anatel*, TEC |
|-----------------------|---|

\* XGS 116 only

| Performance                            | XGS 116(w) |
|--|------------|
| Firewall throughput                    | 7,700 Mbps |
| Firewall IMIX                          | 4,500 Mbps |
| Firewall Latency (64 byte UDP)         | 8 μs       |
| IPS throughput                         | 2,500 Mbps |
| Threat Protection throughput           | 720 Mbps   |
| NGFW                                   | 2,000 Mbps |
| Concurrent connections                 | 1,600,000  |
| New connections/sec                    | 61,500     |
| IPsec VPN throughput                   | 4,800 Mbps |
| IPsec VPN concurrent tunnels           | 1,500      |
| SSL VPN concurrent tunnels             | 1,250      |
| Xstream SSL/TLS Inspection             | 650 Mbps   |
| Xstream SSL/TLS concurrent connections | 8,192      |

Note: For performance testing methodology, see [page 11](#)

#### Wireless Specification (XGS 116w only)

|                                     |   |
|-------------------------------------|---|
| <b>No. of antennas</b>              | 2 external                                    |
| <b>MIMO capabilities</b>            | 2 x 2:2                                       |
| <b>Wireless interface</b>           | Wi-Fi 5/802.11a/b/g/n/ac<br>(2.4 GHz / 5 GHz) |
| <b>Optional second Wi-Fi module</b> | Wi-Fi 5/802.11a/b/g/n/ac                      |

#### Physical Interfaces

|  |  |
|--|--|
| <b>Storage (local quarantine/logs)</b> | Integrated 64 GB SSD   |
| <b>Ethernet interfaces (fixed)</b>     | 8 GbE copper<br>1 GbE SFP*   |
| <b>Power-over-Ethernet (fixed)</b>     | 1 x GbE<br>803.2at (30W max.)  |
| <b>Management ports</b>                | 1 x COM RJ45<br>1 x Micro-USB (cable incl.)  |
| <b>Other I/O ports</b>                 | 1 x USB 2.0 (front)<br>1 x USB 3.0 (rear)  |
| <b>Number of expansion slots</b>       | 1  |
| <b>Optional add-on connectivity</b>    | SFP DSL module (VDSL2)<br>3G/4G module/5G module<br>Second Wi-Fi radio (XGS 116w only)<br>SFP transceivers |

\* SFP transceivers sold separately

# Sophos XGS Series Desktop: SMB and Branch Office


## XGS 126, XGS 126w, XGS 136, XGS 136w

### Technical Specifications

#### Front View



#### Back View

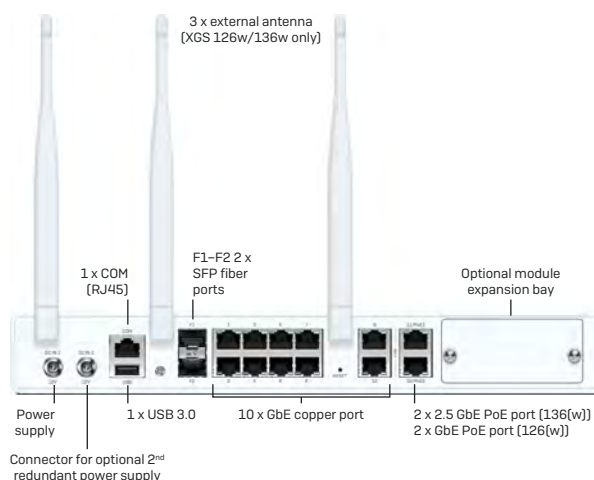

#### Physical Specifications

|  |  |
|--|--|
| <b>Mounting</b>                              | Rackmount kit available (to be ordered separately)                                   |
| <b>Dimensions<br/>Width x Height x Depth</b> | 320 x 44 x 213 mm  |
| <b>Weight</b>                                | 2.4 kg/5.29 lbs (unpacked)<br>4.4 kg/9.70 lbs (packed)<br>(w-model minimally higher) |

#### Environment

|                              |   |
|------------------------------|---|
| <b>Power supply</b>          | External auto-ranging AC-DC<br>100-240VAC, 2.5A@50-60 Hz<br>12VDC, 12.5A, 150W<br>Optional second redundant power supply  |
| <b>Power consumption</b>     | 126/136: 30 W/102 BTU/hr [idle]<br>126w/136w: 32 W/109 BTU/hr [idle]<br>126: 59 W/202 BTU/hr [max.]<br>126w/136: 62 W/212 BTU/hr [max.]<br>136w: 65 W/222 BTU/hr [max.] |
| <b>PoE addition enabled</b>  | 76 W/260 BTU/hr (max.)  |
| <b>Operating temperature</b> | 0°C to 40°C (operating)<br>-20°C to +70°C (storage)   |
| <b>Humidity</b>              | 10% to 90%, non-condensing  |

#### Product Certifications

|                       |   |
|-----------------------|---|
| <b>Certifications</b> | CB, CE, UKCA, UL, FCC, ISED, VCCI, CCC, KC*, BSMI, RCM, NOM, Anatel†, TEC, SDPPI† |
|-----------------------|---|

\* XGS 126 and XGS 136 only

† XGS 136 only

| Performance                            | XGS 126(w)  | XGS 136(w)  |
|--|-------------|-------------|
| Firewall throughput                    | 10,500 Mbps | 11,500 Mbps |
| Firewall IMIX                          | 5,250 Mbps  | 6,500 Mbps  |
| Firewall Latency (64 byte UDP)         | 8 μs        | 8 μs        |
| IPS throughput                         | 3,250 Mbps  | 4,000 Mbps  |
| Threat Protection throughput           | 900 Mbps    | 1,000 Mbps  |
| NGFW                                   | 2,500 Mbps  | 3,000 Mbps  |
| Concurrent connections                 | 5,000,000   | 6,400,000   |
| New connections/sec                    | 69,900      | 74,500      |
| IPsec VPN throughput                   | 5,500 Mbps  | 6,350 Mbps  |
| IPsec VPN concurrent tunnels           | 2,500       | 2,500       |
| SSL VPN concurrent tunnels             | 1,500       | 1,500       |
| Xstream SSL/TLS Inspection             | 800 Mbps    | 950 Mbps    |
| Xstream SSL/TLS concurrent connections | 12,288      | 18,432      |

Note: For performance testing methodology, see [page 11](#)

#### Wireless Specification (XGS 126w and XGS 136w only)

|   |   |
|---|---|
| <b>No. of antennas</b>                      | 3 external                                    |
| <b>MIMO capabilities</b>                    | 3 x 3:3                                       |
| <b>Wireless interface</b>                   | Wi-Fi 5/802.11a/b/g/n/ac<br>(2.4 GHz / 5 GHz) |
| <b>Optional 2<sup>nd</sup> Wi-Fi Module</b> | Wi-Fi 5/802.11a/b/g/n/ac                      |

#### Physical Interfaces

|  |  |   |
|--|--|---|
| <b>Storage (local quarantine/logs)</b> | Integrated 64 GB SSD   |   |
| <b>Ethernet interfaces (fixed)</b>     | 12 x GbE copper<br>2 x SFP fiber*  | 10 x GbE copper<br>2 x 2.5 GbE copper<br>2 x SFP fiber* |
| <b>Power-over-Ethernet (fixed)</b>     | 2 x GbE<br>(30W max. per port)   | 2 x 2.5 GbE<br>(30W max. per port)                      |
| <b>Management ports</b>                | 1 x COM RJ45<br>1 x Micro-USB (cable incl.)  |   |
| <b>Other I/O ports</b>                 | 1 x USB 2.0 (front)<br>1 x USB 3.0 (rear)  |   |
| <b>Number of expansion slots</b>       | 1  |   |
| <b>Optional add-on connectivity</b>    | SFP DSL module (VDSL2)<br>3G/4G module/5G module<br>Second Wi-Fi radio<br>(XGS 126w/136w only)<br>SFP transceivers |   |

\* SFP transceivers sold separately

## Sophos XGS Series 1U: Distributed Edge

Mid-sized and distributed organizations that need a versatile solution to power and protect their networks will be well-served with our 1U models. These rackmount firewalls offer excellent performance, a diverse range of high-speed interfaces and a choice of add-on connectivity modules. Whether your priority is ensuring maximum uptime for your SD-WAN links, securely connecting your remote users, or protecting your growing organization's network, you can tailor these models to your dynamic environment.

All models are powered by a high-speed CPU plus a dedicated Xstream Flow Processor for hardware acceleration.

### Product Highlights

- Dual processor architecture supports all key protection features without compromising performance
- Copper and fiber ports built in
- LAN bypass ports on every model
- Modular Flexi Port expansion bay(s) on every model to adapt connectivity
- Second power supply option for all models
- Centrally powered PoE Flexi Port module option to provide redundant power for PoE devices
- Rackmount kit included

### Product Highlights

#### XGS 2100

See detailed [technical specifications](#)

#### XGS 2300

See detailed [technical specifications](#)

#### XGS 3100

See detailed [technical specifications](#)

#### XGS 3300

See detailed [technical specifications](#)

#### XGS 4300

See detailed [technical specifications](#)

#### XGS 4500

See detailed [technical specifications](#)

### LAN and WAN Edge Connectivity



Securely connect your branch offices or remote locations to your main office with Sophos SD-WAN, Remote Ethernet Devices, and add connectivity at the LAN edge with our access layer switches and access points. Find out more at the end of this brochure and [sophos.com/switch](http://sophos.com/switch).



# Sophos XGS Series 1U: Distributed Edge

## XGS 2100, XGS 2300

### Technical Specifications

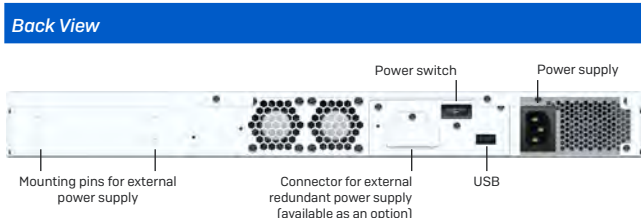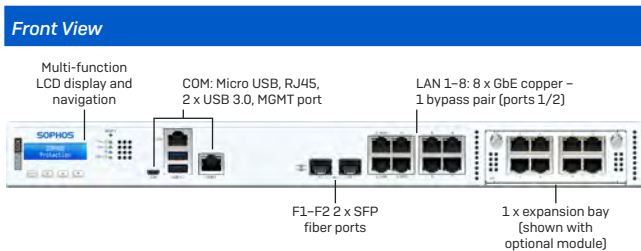

#### Physical Specifications

|  |  |
|--|--|
| <b>Mounting</b>                              | 1U rackmount<br>(2 rackmount ears included)            |
| <b>Dimensions<br/>Width x Height x Depth</b> | 438 x 44 x 405 mm                                      |
| <b>Weight</b>                                | 4.7 kg/10.36 lbs (unpacked)<br>7 kg/15.43 lbs (packed) |

#### Environment

|                              |  |
|------------------------------|--|
| <b>Power supply</b>          | Internal auto-ranging AC-DC<br>100-240VAC, 3-6A@50-60 Hz<br>External Redundant PSU Option  |
| <b>Power consumption</b>     | 2100: 43 W/146.86 BTU/hr (idle)<br>2300: 45 W/153.7 BTU/hr (idle)<br>2100: 162 W/533.5 BTU/hr (max.)<br>2300: 167 W/570.74 BTU/hr (max.) |
| <b>PoE addition enabled</b>  | 76 W/260 BTU/hr (max.)   |
| <b>Operating temperature</b> | 0°C to 40°C (operating)<br>-20°C to +70°C (storage)  |
| <b>Humidity</b>              | 10% to 90%, non-condensing   |

#### Product Certifications

|                       |  |
|-----------------------|--|
| <b>Certifications</b> | CB, CE, UKCA, UL, FCC, ISED, VCCI, KC, RCM, NOM, Anatel, CCC, BSMI, TEC, SDPPI |
|-----------------------|--|

| Performance                                   | XGS 2100    | XGS 2300    |
|---|-------------|-------------|
| <b>Firewall throughput</b>                    | 30,000 Mbps | 39,000 Mbps |
| <b>Firewall IMIX</b>                          | 16,500 Mbps | 20,000 Mbps |
| <b>Firewall Latency (64 byte UDP)</b>         | 6 µs        | 4 µs        |
| <b>IPS throughput</b>                         | 6,000 Mbps  | 7,000 Mbps  |
| <b>Threat Protection throughput</b>           | 1,250 Mbps  | 1,500 Mbps  |
| <b>NGFW</b>                                   | 5,200 Mbps  | 6,300 Mbps  |
| <b>Concurrent connections</b>                 | 6,500,000   | 6,500,000   |
| <b>New connections/sec</b>                    | 134,700     | 148,000     |
| <b>IPsec VPN throughput</b>                   | 17,000 Mbps | 20,500 Mbps |
| <b>IPsec VPN concurrent tunnels</b>           | 5,000       | 5,000       |
| <b>SSL VPN concurrent tunnels</b>             | 2,500       | 2,500       |
| <b>Xstream SSL/TLS Inspection</b>             | 1,100 Mbps  | 1,450 Mbps  |
| <b>Xstream SSL/TLS concurrent connections</b> | 18,432      | 18,432      |

Note: For performance testing methodology, see [page 11](#)

#### Physical Interfaces

|   |  |
|---|--|
| <b>Storage<br/>(local quarantine/logs)</b>                    | Integrated min. 120 GB SATA-III SSD  |
| <b>Ethernet interfaces<br/>(fixed)</b>                        | 8 x GbE copper<br>2 x SFP fiber*   |
| <b>Bypass port pairs</b>                                      | 1  |
| <b>Management ports</b>                                       | 1 x RJ45 MGMT<br>1 x COM RJ45<br>1 x Micro-USB (cable incl.)   |
| <b>Other I/O ports</b>  | 2 x USB 3.0 (front)<br>1 x USB 2.0 (rear)  |
| <b>Number of Flexi Port slots</b>                             | 1  |
| <b>Flexi Port modules<br/>(optional)</b>                      | 8 port GbE copper<br>8 port GbE SFP fiber<br>4 port 10GE SFP+ fiber<br>4 port GbE copper bypass (2 pairs)<br>4 port GbE copper PoE +<br>4 port GbE copper<br>4 port 2.5 GbE copper PoE<br>2 port GbE Fiber (LC) bypass<br>+ 4 port GbE SFP Fiber |
| <b>Max. total port density<br/>(incl. use of modules)</b>     | 18   |
| <b>Max. Power-over-Ethernet<br/>(using Flexi Port module)</b> | 1 module: 4 ports, 60W max.  |
| <b>Optional add-on connectivity</b>                           | SFP DSL module (VDSL2)<br>SFP/SFP+ Transceivers  |
| <b>Display</b>  | Multi-function LCD module  |


\* Transceivers (mini GBICs) sold separately

# Sophos XGS Series 1U: Distributed Edge


## XGS 3100, XGS 3300

### Technical Specifications

#### Front View

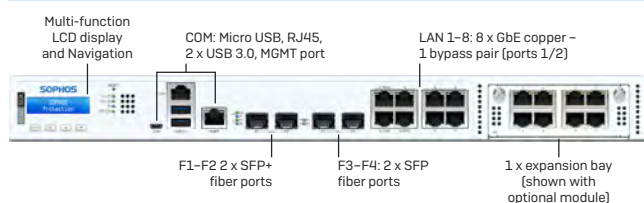

#### Back View

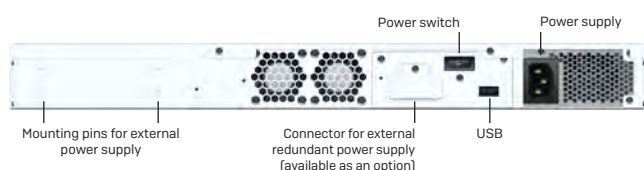

#### Physical Specifications

|                                      |  |
|--------------------------------------|--|
| Mounting                             | 1U rackmount<br>(2 rackmount ears included)            |
| Dimensions<br>Width x Height x Depth | 438 x 44 x 405 mm                                      |
| Weight                               | 4.7 kg/10.36 lbs (unpacked)<br>7 kg/15.43 lbs (packed) |

#### Environment

|                       |  |
|-----------------------|--|
| Power supply          | Internal auto-ranging AC-DC<br>100-240VAC, 3-6A@50-60 Hz<br>External Redundant PSU Option  |
| Power consumption     | 3100: 50 W/170.77 BTU/hr (idle)<br>3300: 50 W/170.77 BTU/hr (idle)<br>3100: 182 W/621.97 BTU/hr (max.)<br>3300: 201 W/686.68 BTU/hr (max.) |
| PoE addition enabled  | 76 W/260 BTU/hr (max.)   |
| Operating temperature | 0°C to 40°C (operating)<br>-20°C to +70°C (storage)  |
| Humidity              | 10% to 90%, non-condensing   |

#### Product Certifications

|                |  |
|----------------|--|
| Certifications | CB, CE, UKCA, UL, FCC, ISED, VCCI, KC, RCM, NOM, Anatel, CCC, BSMI, TEC, SDPPI |
|----------------|--|

| Performance                            | XGS 3100    | XGS 3300    |
|--|-------------|-------------|
| Firewall throughput                    | 47,000 Mbps | 58,000 Mbps |
| Firewall IMIX                          | 23,500 Mbps | 27,000 Mbps |
| Firewall Latency (64 byte UDP)         | 4 µs        | 4 µs        |
| IPS throughput                         | 10,500 Mbps | 14,000 Mbps |
| Threat Protection throughput           | 2,000 Mbps  | 3,000 Mbps  |
| NGFW                                   | 9,000 Mbps  | 12,500 Mbps |
| Concurrent connections                 | 12,260,000  | 13,700,000  |
| New connections/sec                    | 186,500     | 257,800     |
| IPsec VPN throughput                   | 25,000 Mbps | 31,100 Mbps |
| IPsec VPN concurrent tunnels           | 6,500       | 6,500       |
| SSL VPN concurrent tunnels             | 5,000       | 5,000       |
| Xstream SSL/TLS Inspection             | 2,470 Mbps  | 3,130 Mbps  |
| Xstream SSL/TLS concurrent connections | 55,296      | 102,400     |

Note: For performance testing methodology, see [page 11](#)

#### Physical Interfaces

|   |  |
|---|--|
| Storage<br>[local quarantine/logs]                    | Integrated min. 240 GB SATA-III SSD  |
| Ethernet interfaces<br>(fixed)                        | 8 x GE copper<br>2 x SFP fiber*<br>2 x SFP+ 10 GbE fiber*  |
| Bypass port pairs                                     | 1  |
| Management ports                                      | 1 x RJ45 MGMT<br>1 x COM RJ45<br>1 x Micro-USB (cable incl.)   |
| Other I/O ports                                       | 2 x USB 3.0 (front)<br>1 x USB 2.0 (rear)  |
| Number of Flexi Port slots                            | 1  |
| Flexi Port modules<br>(optional)                      | 8 port GbE copper<br>8 port GbE SFP fiber<br>4 port 10 GbE SFP+ fiber<br>4 port GbE copper bypass (2 pairs)<br>4 port GbE copper PoE +<br>4 port GbE copper<br>4 port 2.5 GbE copper PoE<br>2 port GbE Fiber (LC) bypass<br>+ 4 port GbE SFP Fiber |
| Max. total port density<br>(incl. use of modules)     | 20   |
| Max. Power-over-Ethernet<br>(using Flexi Port module) | 1 module: 4 ports, 60W max.  |
| Optional add-on connectivity                          | SFP DSL module (VDSL2)<br>SFP/SFP+ Transceivers  |
| Display   | Multi-function LCD module  |

\* Transceivers (mini GBICs) sold separately




# Sophos XGS Series 1U: Distributed Edge


## XGS 4300

### Technical Specifications

#### Front View

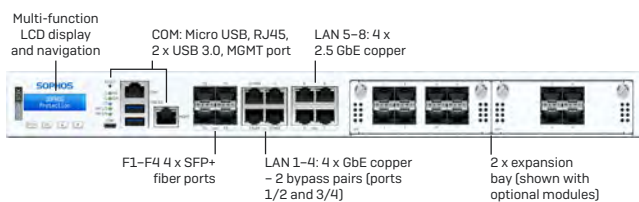

#### Back View

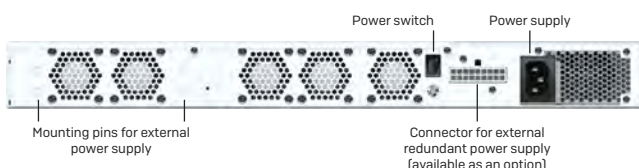

#### Physical Specifications

|                                      |   |
|--------------------------------------|---|
| Mounting                             | 1U rackmount (sliding rails incl.)                        |
| Dimensions<br>Width x Height x Depth | 438 x 44 x 510 mm   |
| Weight                               | 8.7 kg/19.18 lbs (unpacked)<br>14.9 kg/32.85 lbs (packed) |

#### Environment

|                       |   |
|-----------------------|---|
| Power supply          | Internal auto-ranging AC-DC<br>100-240VAC, 3.7-7.4A@50-60 Hz<br>External Redundant PSU Option |
| Power consumption     | 131 W/447.43 BTU/hr (idle)<br>268.35 W/916.56 BTU/hr (max.)                                   |
| PoE addition enabled  | 152 W/519 BTU/hr  |
| Operating temperature | 0°C to 40°C (operating)<br>-20 to +70°C (storage)   |
| Humidity              | 10% to 90%, non-condensing  |

#### Product Certifications

|                |  |
|----------------|--|
| Certifications | CB, CE, UKCA, UL, FCC, ISED, VCCI, KC, RCM, NOM, Anatel, CCC, BSMI, TEC, SDPPI |
|----------------|--|

| Performance                            | XGS 4300    |
|--|-------------|
| Firewall throughput                    | 75,000 Mbps |
| Firewall IMIX                          | 33,000 Mbps |
| Firewall Latency (64 byte UDP)         | 3 µs        |
| IPS throughput                         | 29,500 Mbps |
| Threat Protection throughput           | 6,500 Mbps  |
| NGFW                                   | 23,000 Mbps |
| Concurrent connections                 | 16,600,000  |
| New connections/sec                    | 368,000     |
| IPsec VPN throughput                   | 62,500 Mbps |
| IPsec VPN concurrent tunnels           | 8,500       |
| SSL VPN concurrent tunnels             | 7,500       |
| Xstream SSL/TLS Inspection             | 8,000 Mbps  |
| Xstream SSL/TLS concurrent connections | 276,480     |

Note: For performance testing methodology, see [page 11](#)

#### Physical Interfaces

|   |  |
|---|--|
| Storage<br>(local quarantine/logs)                    | 1 x min. 240 GB SATA-III SSD   |
| Ethernet interfaces<br>(fixed)                        | 4 x GbE copper<br>4 x 2.5 GbE copper<br>4 x SFP+ 10 GbE fiber*   |
| Bypass port pairs                                     | 2  |
| Management ports                                      | 1 x RJ45 MGMT<br>1 x COM RJ45<br>1 x Micro-USB (cable incl.)   |
| Other I/O ports                                       | 2 x USB 3.0 (front)  |
| Number of Flexi Port slots                            | 2  |
| Flexi Port modules<br>(optional)                      | 8 port GbE copper<br>8 port GbE SFP fiber<br>4 port 10 GbE SFP+ fiber<br>4 port GbE copper bypass (2 pairs)<br>4 port GbE copper PoE +<br>4 port GbE copper<br>4 port 2.5 GbE copper PoE<br>2 port GbE Fiber (LC) bypass<br>+ 4 port GbE SFP Fiber |
| Max. total port density<br>(incl. use of modules)     | 28   |
| Max. Power-over-Ethernet<br>(using Flexi Port module) | 2 modules: 4 ports, 60W max. each  |
| Optional add-on connectivity                          | SFP DSL module (VDSL2)<br>SFP/SFP+ Transceivers  |
| Display   | Multi-function LCD module  |


\* Transceivers (mini GBICs) sold separately

# Sophos XGS Series 1U: Distributed Edge


## XGS 4500

### Technical Specifications

#### Front View

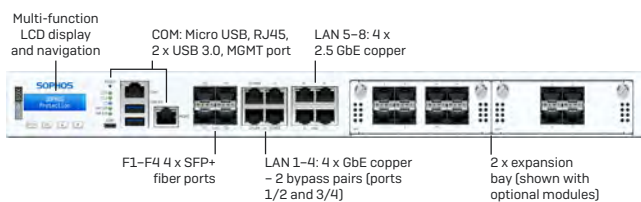

#### Back View

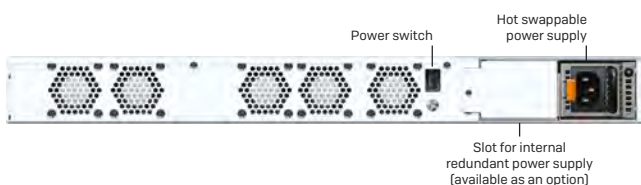

#### Physical Specifications

|  |   |
|--|---|
| <b>Mounting</b>                              | 1U rackmount (sliding rails incl.)                        |
| <b>Dimensions<br/>Width x Height x Depth</b> | 438 x 44 x 510 mm   |
| <b>Weight</b>                                | 9.7 kg/21.38 lbs (unpacked)<br>15.9 kg/35.05 lbs (packed) |

#### Environment

|                              |  |
|------------------------------|--|
| <b>Power supply</b>          | Internal Hot Swappable auto-ranging AC-DC 100-240VAC, 3.7-7.4A@50-60 Hz<br>Internal Redundant PSU Option |
| <b>Power consumption</b>     | 151 W/515.74 BTU/hr (idle)<br>268.35 W/916.56 BTU/hr (max.)  |
| <b>PoE addition enabled</b>  | 152 W/519 BTU/hr   |
| <b>Operating temperature</b> | 0°C to 40°C (operating)<br>-20 to +70°C (storage)  |
| <b>Humidity</b>              | 10% to 90%, non-condensing   |

#### Product Certifications

|                       |  |
|-----------------------|--|
| <b>Certifications</b> | CB, CE, UKCA, UL, FCC, ISED, VCCI, KC, RCM, NOM, Anatel, CCC, BSMI, TEC, SDPPI |
|-----------------------|--|

| Performance                            | XGS 4500    |
|--|-------------|
| Firewall throughput                    | 80,000 Mbps |
| Firewall IMIX                          | 37,000 Mbps |
| Firewall Latency (64 byte UDP)         | 4 µs        |
| IPS throughput                         | 36,500 Mbps |
| Threat Protection throughput           | 8,650 Mbps  |
| NGFW                                   | 30,000 Mbps |
| Concurrent connections                 | 17,200,000  |
| New connections/sec                    | 450,000     |
| IPsec VPN throughput                   | 75,550 Mbps |
| IPsec VPN concurrent tunnels           | 8,500       |
| SSL VPN concurrent tunnels             | 10,000      |
| Xstream SSL/TLS Inspection             | 10,600 Mbps |
| Xstream SSL/TLS concurrent connections | 276,480     |

Note: For performance testing methodology, see [page 11](#)

#### Physical Interfaces

|   |  |
|---|--|
| <b>Storage<br/>(local quarantine/logs)</b>                    | 2 x min. 240 GB SATA-III SSD (SW RAID-1)   |
| <b>Ethernet interfaces<br/>(fixed)</b>                        | 4 x GbE copper<br>4 x 2.5 GbE copper<br>4 x SFP+ 10 GbE fiber*   |
| <b>Bypass port pairs</b>                                      | 2  |
| <b>Management ports</b>                                       | 1 x RJ45 MGMT<br>1 x COM RJ45<br>1 x Micro-USB (cable incl.)   |
| <b>Other I/O ports</b>  | 2 x USB 3.0 (front)  |
| <b>Number of Flexi Port slots</b>                             | 2  |
| <b>Flexi Port modules<br/>(optional)</b>                      | 8 port GbE copper<br>8 port GbE SFP fiber<br>4 port 10 GbE SFP+ fiber<br>4 port GbE copper bypass (2 pairs)<br>4 port GbE copper PoE +<br>4 port GbE copper<br>4 port 2.5 GbE copper PoE<br>2 port GbE Fiber (LC) bypass<br>+ 4 port GbE SFP Fiber |
| <b>Max. total port density<br/>(incl. use of modules)</b>     | 28   |
| <b>Max. Power-over-Ethernet<br/>(using Flexi Port module)</b> | 2 modules: 4 ports, 60W max. each  |
| <b>Optional add-on connectivity</b>                           | SFP DSL module (VDSL2)<br>SFP/SFP+ Transceivers  |
| <b>Display</b>  | Multi-function LCD module  |

\* Transceivers (mini GBICs) sold separately

## Sophos XGS Series 2U: Enterprise and Campus Edge

Distributed and growing enterprises that require maximum throughput for even the most complex network get no-compromise protection, performance, and business continuity with these next-gen firewalls. The Xstream Flow Processors provide dedicated hardware acceleration to easily handle full-on protection for today's encrypted, cloud-hosted applications and traffic. These models strike the perfect balance between port density and modularity, with a range of high-speed, built-in ports, plus additional high-density Flexi Port modules available to extend connectivity even further.

All models are powered by a high-speed CPU plus a dedicated Xstream Flow Processor for enterprise-grade hardware acceleration.

### Product Highlights

- Dual-processor architecture with dedicated co-processor for hardware acceleration
- Built to power all key threat protection features such as TLS inspection, sandboxing, and AI-driven threat analysis
- Excellent price-to-performance ratio
- A range of standard 1 GE copper plus 8 to 12 SFP+ 10 GbE fiber interfaces built in
- QSPF28 ports on the XGS 7500 and 8500 provide port speeds of up to 40 Gbps (7500) and 100 Gbps (8500)
- Optional standard and high-density Flexi Port modules available to extend and adapt connectivity
- Maximum port density of 48 (XGS 5500), 68 (XGS 6500), or 70 (XGS 7500/8500) using optional modules
- Redundancy features on all models ensure business continuity

### Product Highlights

#### XGS 5500

See detailed [technical specifications](#)

#### XGS 6500


See detailed [technical specifications](#)

#### XGS 7500

See detailed [technical specifications](#)

#### XGS 8500

See detailed [technical specifications](#)

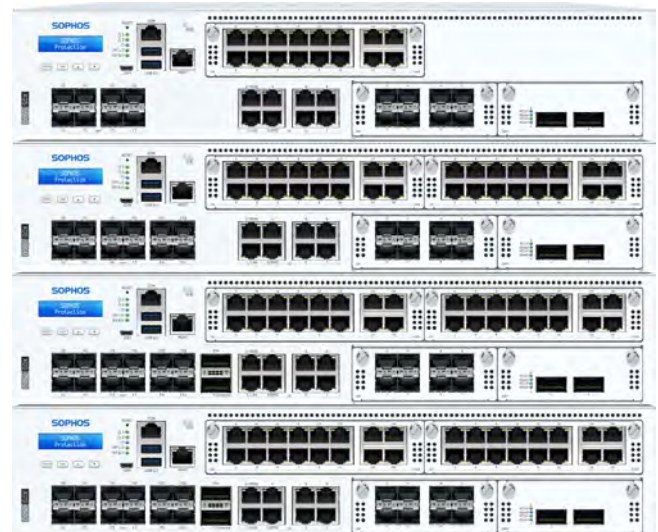


# Sophos XGS Series 2U: Enterprise Edge

## XGS 5500

### Technical Specifications

#### Front View

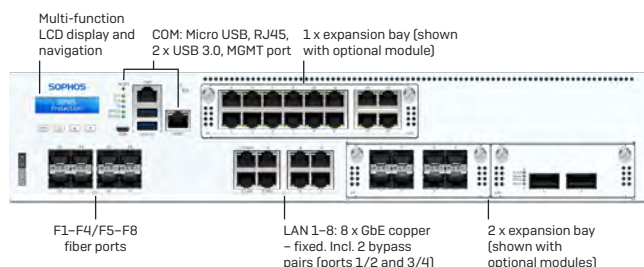

#### Back View



#### Physical Specifications

|                                      |  |
|--------------------------------------|--|
| Mounting                             | 2U sliding rails (included)                              |
| Dimensions<br>Width x Height x Depth | 438 x 88 x 645 mm  |
| Weight                               | 17.8 kg/39.24 lbs (unpacked)<br>27 kg/59.53 lbs (packed) |

#### Environment

|                       |   |
|-----------------------|---|
| Power supply          | 2 x hot-swap internal auto-ranging 100-240VAC, 50-60 Hz PSU |
| Power consumption     | 168.0W/573.81 BTU/h (idle)<br>478.01W/1117.43 BTU/h (max.)  |
| Operating temperature | 0°C to 40°C (operating)<br>-20°C to +70°C (storage)         |
| Humidity              | 10% to 90%, non-condensing                                  |

#### Product Certifications

|                |   |
|----------------|---|
| Certifications | CB, CE, UKCA, UL, FCC, ISED, VCCI, BSMI, RCM, NOM, Anatel, KC, CCC, SDPPI<br>Planned: TEC |
|----------------|---|

| Performance                            | XGS 5500     |
|--|--------------|
| Firewall throughput                    | 100,000 Mbps |
| Firewall IMIX                          | 52,000 Mbps  |
| Firewall Latency (64 byte UDP)         | 5 µs         |
| IPS throughput                         | 40,000 Mbps  |
| Threat Protection throughput           | 14,000 Mbps  |
| NGFW                                   | 38,000 Mbps  |
| Concurrent connections                 | 32,400,000   |
| New connections/sec                    | 468,000      |
| IPsec VPN throughput                   | 92,500 Mbps  |
| IPsec VPN concurrent tunnels           | 10,000       |
| SSL VPN concurrent tunnels             | 15,000       |
| Xstream SSL/TLS Inspection             | 13,500 Mbps  |
| Xstream SSL/TLS concurrent connections | 512,000      |

Note: For performance testing methodology, see [page 11](#)

#### Physical Interfaces

|   |   |
|---|---|
| Storage<br>(local quarantine/logs)                | 2 x min. 480 GB SATA-III SSD<br>HW RAID built into CPU  |
| Ethernet interfaces<br>(fixed)                    | 8 x GbE copper<br>8 x SFP+ 10 GbE fiber*  |
| Bypass port pairs                                 | 2   |
| Management ports                                  | 1 x RJ45 MGMT<br>1 x COM RJ45<br>1 x Micro-USB (cable incl.)  |
| Other I/O ports                                   | 2 x USB 3.0 (front)   |
| Number of Flexi Port slots                        | 2 + 1 for high-density module   |
| Flexi Port modules<br>(optional)                  | 8 port GbE copper<br>8 port GbE SFP fiber<br>4 port 10 GbE SFP+ fiber<br>4 port GbE copper bypass (2 pairs)<br>2 port 40 GbE QSFP+ fiber<br>8 port 10 GbE SFP+ fiber<br>2 port GbE Fiber (LC) bypass<br>+ 4 port GbE SFP Fiber<br>2 port 10 GbE Fiber (LC) bypass<br>+ 4 port 10 GbE SFP+ Fiber<br>High-density module (NIC): 12 port<br>GE copper + 4 port 2.5 GE copper |
| Max. total port density<br>(incl. use of modules) | 48  |
| Optional add-on connectivity                      | SFP DSL module (VDSL2)<br>SFP/SFP+ Transceivers   |
| Display   | Multi-function LCD module   |


\* Transceivers (mini GBICs) sold separately

# Sophos XGS Series 2U: Enterprise Edge


## XGS 6500

### Technical Specifications

#### Front View

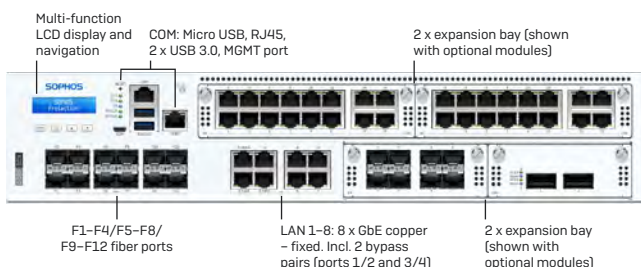

#### Back View

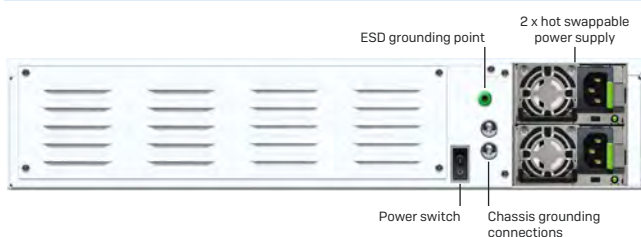

#### Physical Specifications

|                                      |  |
|--------------------------------------|--|
| Mounting                             | 2U sliding rails (included)                              |
| Dimensions<br>Width x Height x Depth | 438 x 88 x 645 mm  |
| Weight                               | 17.8 kg/39.24 lbs (unpacked)<br>27 kg/59.53 lbs (packed) |

#### Environment

|                       |  |
|-----------------------|--|
| Power supply          | 2 x hot-swap internal auto-ranging 100-240VAC, 50-60 Hz PSU  |
| Power consumption     | 188.00 W/642.13 BTU/h (idle)<br>497.09 W/1697.8 BTU/h (max.) |
| Operating temperature | 0°C to 40°C (operating)<br>-20°C to +70°C (storage)          |
| Humidity              | 10% to 90%, non-condensing                                   |

#### Product Certifications

|                |   |
|----------------|---|
| Certifications | CB, CE, UKCA, UL, FCC, ISED, VCCI, BSMI, RCM, NOM, Anatel, KC, CCC, SDPPI<br>Planned: TEC |
|----------------|---|

| Performance                            | XGS 6500     |
|--|--------------|
| Firewall throughput                    | 120,000 Mbps |
| Firewall IMIX                          | 60,000 Mbps  |
| Firewall Latency (64 byte UDP)         | 5 µs         |
| IPS throughput                         | 50,750 Mbps  |
| Threat Protection throughput           | 17,850 Mbps  |
| NGFW                                   | 46,500 Mbps  |
| Concurrent connections                 | 39,900,000   |
| New connections/sec                    | 496,000      |
| IPsec VPN throughput                   | 109,800 Mbps |
| IPsec VPN concurrent tunnels           | 10,000       |
| SSL VPN concurrent tunnels             | 15,000       |
| Xstream SSL/TLS Inspection             | 16,000 Mbps  |
| Xstream SSL/TLS concurrent connections | 768,000      |

Note: For performance testing methodology, see [page 11](#)

#### Physical Interfaces

|   |   |
|---|---|
| Storage<br>(local quarantine/logs)                | 2 x min. 480 GB SATA-III SSD<br>HW RAID built into CPU  |
| Ethernet interfaces<br>(fixed)                    | 8 x GbE copper<br>12 x SFP+ 10 GbE fiber*   |
| Bypass port pairs                                 | 2   |
| Management ports                                  | 1 x RJ45 MGMT<br>1 x COM RJ45<br>1 x Micro-USB (cable incl.)  |
| Other I/O ports                                   | 2 x USB 3.0 (front)   |
| Number of Flexi Port slots                        | 2 + 2 for high-density module   |
| Flexi Port modules<br>(optional)                  | 8 port GbE copper<br>8 port GbE SFP fiber<br>4 port 10 GbE SFP+ fiber<br>4 port GbE copper bypass (2 pairs)<br>2 port 40 GbE QSFP+ fiber<br>8 port 10 GbE SFP+ fiber<br>2 port GbE Fiber (LC) bypass<br>+ 4 port GbE SFP Fiber<br>2 port 10 GbE Fiber (LC) bypass<br>+ 4 port 10 GbE SFP+ Fiber<br>High-density module (NIC): 12 port<br>GE copper + 4 port 2.5 GE copper |
| Max. total port density<br>(incl. use of modules) | 68  |
| Optional add-on connectivity                      | SFP DSL module (VDSL2)<br>SFP/SFP+ Transceivers   |
| Display   | Multi-function LCD module   |


\* Transceivers (mini GBICs) sold separately

# Sophos XGS Series 2U: Enterprise/Campus Edge


## XGS 7500

### Technical Specifications

#### Front View

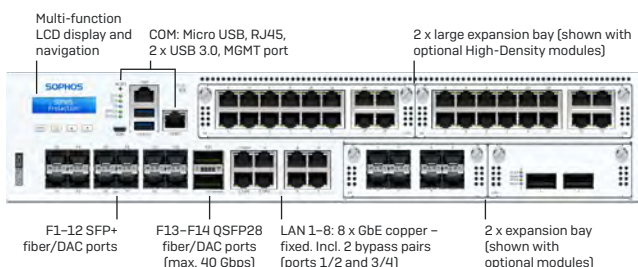

#### Back View

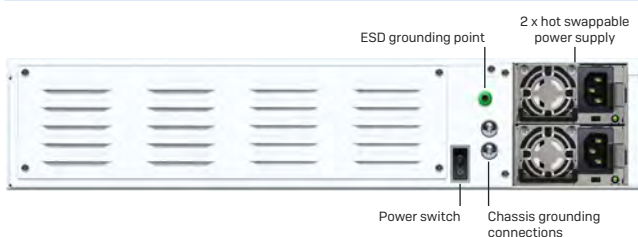

#### Physical Specifications

|   |  |
|---|--|
| <b>Mounting</b>                             | 2U sliding rails (included)                              |
| <b>Dimensions</b><br>Width x Height x Depth | 438 x 88 x 645 mm<br>17.24 x 3.46 x 25.39 inches         |
| <b>Weight</b>                               | 18 kg/39.68 lbs (unpacked)<br>27.3 kg/60.19 lbs (packed) |

#### Environment

|                              |   |
|------------------------------|---|
| <b>Power supply</b>          | 2 x hot-swap internal auto-ranging 100-240VAC, 50-60 Hz PSU |
| <b>Power consumption</b>     | 306 W/1,044 BTU/h (idle)<br>635 W/2,165 BTU/h (max.)        |
| <b>Operating temperature</b> | 0°C to 40°C (operating)<br>-20°C to +70°C (storage)         |
| <b>Humidity</b>              | 10% to 90%, non-condensing                                  |

#### Product Certifications

|                       |  |
|-----------------------|--|
| <b>Certifications</b> | CB, CE, UKCA, UL, FCC, ISED, VCCI, BSMI, RCM, NOM, KC, SDPPI, Anatel, CCC.<br>Planned: TEC |
|-----------------------|--|

| Performance                            | XGS 7500     |
|--|--------------|
| Firewall throughput                    | 160,000 Mbps |
| Firewall IMIX                          | 70,500 Mbps  |
| Firewall Latency (64 byte UDP)         | 5.4 $\mu$ s  |
| IPS throughput                         | 71,500 Mbps  |
| Threat Protection throughput           | 26,000 Mbps  |
| NGFW                                   | 58,000 Mbps  |
| Concurrent connections                 | 48,000,000   |
| New connections/sec                    | 1,100,000    |
| IPsec VPN throughput                   | 117,000 Mbps |
| IPsec VPN concurrent tunnels           | 12,500       |
| SSL VPN concurrent tunnels             | 19,000       |
| Xstream SSL/TLS Inspection             | 19,500 Mbps  |
| Xstream SSL/TLS concurrent connections | 1,280,000    |

Note: For performance testing methodology, see [page 11](#)

#### Physical Interfaces

|  |  |
|--|--|
| <b>Storage</b><br>(local quarantine/logs)                | 2 x min. 960 GB NVMe SSD<br>HW RAID built into CPU   |
| <b>Ethernet interfaces</b><br>(fixed)                    | 8 x GbE copper<br>12 x SFP+ 10 GbE fiber*<br>2 x QSFP28 (up to 40 Gbps)  |
| <b>Bypass port pairs</b>                                 | 2  |
| <b>Management ports</b>                                  | 1 x RJ45 MGMT<br>1 x COM RJ45<br>1 x Micro-USB (cable incl.)   |
| <b>Other I/O ports</b>                                   | 2 x USB 3.0 (front)  |
| <b>Number of Flexi Port slots</b>                        | 2 + 2 for high-density module  |
| <b>Flexi Port modules</b><br>(optional)                  | 8 port GbE copper<br>8 port GbE SFP fiber<br>4 port 10 GbE SFP+ fiber<br>4 port GbE copper bypass (2 pairs)<br>2 port 40 GbE QSFP+ fiber<br>8 port 10 GbE SFP+ fiber<br>2 port GbE Fiber (LC) bypass<br>+ 4 port GbE SFP Fiber<br>2 port 10 GbE Fiber (LC) bypass<br>+ 4 port 10 GbE SFP+ Fiber<br>High-density module (NIC): 12 port GE copper + 4 port 2.5 GE copper |
| <b>Max. total port density</b><br>(incl. use of modules) | 70   |
| <b>Optional add-on connectivity</b>                      | SFP DSL module (VDSL2)<br>SFP/SFP+ Transceivers  |
| <b>Display</b>   | Multi-function LCD module  |

\* Transceivers (mini GBICs) sold separately




# Sophos XGS Series 2U: Enterprise/Campus Edge


## XGS 8500

### Technical Specifications

#### Front View

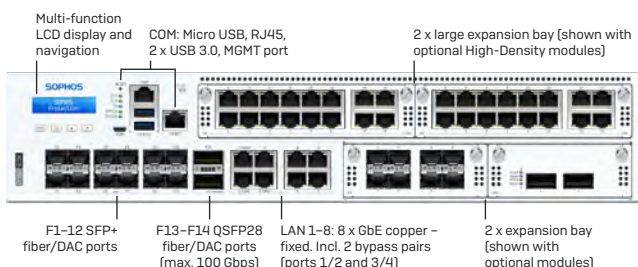

#### Back View

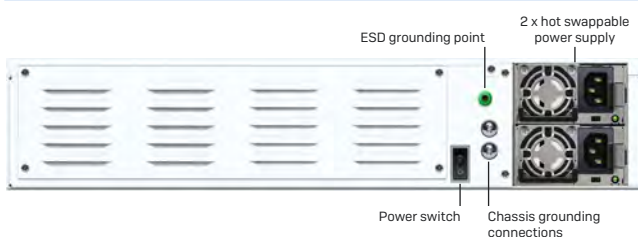

#### Physical Specifications

|   |  |
|---|--|
| <b>Mounting</b>                             | 2U sliding rails (included)                              |
| <b>Dimensions</b><br>Width x Height x Depth | 438 x 88 x 645 mm<br>17.24 x 3.46 x 25.39 inches         |
| <b>Weight</b>                               | 18 kg/39.68 lbs (unpacked)<br>27.3 kg/60.19 lbs (packed) |

#### Environment

|                              |   |
|------------------------------|---|
| <b>Power supply</b>          | 2 x hot-swap internal auto-ranging 100-240VAC, 50-60 Hz PSU |
| <b>Power consumption</b>     | 318 W/1,085 BTU/h (idle)<br>645 W/2,200 BTU/h (max.)        |
| <b>Operating temperature</b> | 0°C to 40°C (operating)<br>-20°C to +70°C (storage)         |
| <b>Humidity</b>              | 10% to 90%, non-condensing                                  |

#### Product Certifications

|                       |  |
|-----------------------|--|
| <b>Certifications</b> | CB, CE, UKCA, UL, FCC, ISED, VCCI, BSMI, RCM, NOM, KC, SDPPI, Anatel, CCC.<br>Planned: TEC |
|-----------------------|--|

| Performance                            | XGS 8500     |
|--|--------------|
| Firewall throughput                    | 190,000 Mbps |
| Firewall IMIX                          | 81,000 Mbps  |
| Firewall Latency (64 byte UDP)         | 5.5 $\mu$ s  |
| IPS throughput                         | 93,000 Mbps  |
| Threat Protection throughput           | 34,000 Mbps  |
| NGFW                                   | 76,000 Mbps  |
| Concurrent connections                 | 58,000,000   |
| New connections/sec                    | 1,700,000    |
| IPsec VPN throughput                   | 141,000 Mbps |
| IPsec VPN concurrent tunnels           | 15,000       |
| SSL VPN concurrent tunnels             | 24,000       |
| Xstream SSL/TLS Inspection             | 24,000 Mbps  |
| Xstream SSL/TLS concurrent connections | 2,500,000    |

Note: For performance testing methodology, see [page 11](#)

#### Physical Interfaces

|   |  |
|---|--|
| <b>Storage (local quarantine/logs)</b>                | 2 x min. 960 GB NVMe SSD<br>HW RAID built into CPU   |
| <b>Ethernet interfaces (fixed)</b>                    | 8 x GbE copper<br>12 x SFP+ 10 GbE fiber*<br>2 x QSFP28 (up to 100 Gbps)   |
| <b>Bypass port pairs</b>                              | 2  |
| <b>Management ports</b>                               | 1 x RJ45 MGMT<br>1 x COM RJ45<br>1 x Micro-USB (cable incl.)   |
| <b>Other I/O ports</b>                                | 2 x USB 3.0 (front)  |
| <b>Number of Flexi Port slots</b>                     | 2 + 2 for high-density module  |
| <b>Flexi Port modules (optional)</b>                  | 8 port GbE copper<br>8 port GbE SFP fiber<br>4 port 10 GbE SFP+ fiber<br>4 port GbE copper bypass (2 pairs)<br>2 port 40 GbE QSFP+ fiber<br>8 port 10 GbE SFP+ fiber<br>2 port GbE Fiber (LC) bypass<br>+ 4 port GbE SFP Fiber<br>2 port 10 GbE Fiber (LC) bypass<br>+ 4 port 10 GbE SFP+ Fiber<br>High-density module (NIC): 12 port GE copper + 4 port 2.5 GE copper |
| <b>Max. total port density (incl. use of modules)</b> | 70   |
| <b>Optional add-on connectivity</b>                   | SFP DSL module (VDSL2)<br>SFP/SFP+ Transceivers  |
| <b>Display</b>  | Multi-function LCD module  |




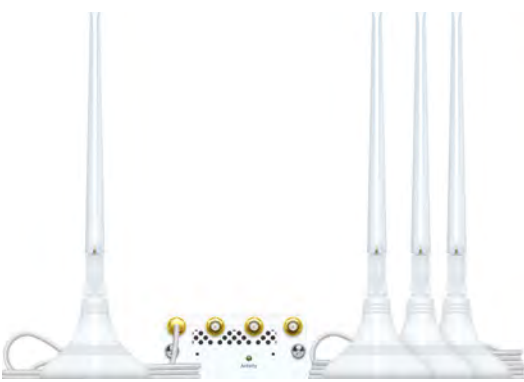
\* Transceivers (mini GBICs) sold separately

## Adapt Connectivity with Optional Modules

### Connectivity Modules

Add additional connectivity options to your appliances to enhance the range and performance of your network.

### XGS Series: Optional Connectivity Modules












| Desktop Modules   |   | Other Connectivity Options   |
|---|---|--|
|  <p><b>2nd Wi-Fi 5 Module</b><br/>For XGS 116w, 126w, and 136w only<br/>(not compatible with XG Series)</p>      |  <p><b>3G/4G Module</b><br/>For XGS 116(w), 126(w), and 136(w) models only<br/>(not compatible with XG Series)</p> |  <p><b>SFP VDSL2 Modem</b><br/>For all XGS and XG Series with an SFP port</p> |
|  <p><b>5G Module</b><br/>For XGS 116(w), 126(w), and 136(w) models only<br/>(not compatible with XG Series)</p> |   | <p><b>Optional Transceivers</b><br/>A range of optional transceivers are available, incl. SFP, SFP+</p>  |

### XGS Series: Desktop Accessory Matrix by Model

| Model    | Redundancy                            | Connectivity  |                            |   |                | Mounting      |
|----------|---------------------------------------|---------------|----------------------------|---|----------------|---------------|
|          | Power                                 | Expansion Bay | 3G/4G module/<br>5G module | Wi-Fi Options                               | VDSL SFP Modem | Rackmount Kit |
| XGS 87   | n/a                                   | n/a           | n/a                        | n/a   | Optional       | Optional      |
| XGS 87w  | n/a                                   | n/a           | n/a                        | Built in                                    | Optional       | Optional      |
| XGS 107  | Optional 2 <sup>nd</sup> power supply | n/a           | n/a                        | n/a   | Optional       | Optional      |
| XGS 107w | Optional 2 <sup>nd</sup> power supply | n/a           | n/a                        | Built in                                    | Optional       | Optional      |
| XGS 116  | Optional 2 <sup>nd</sup> power supply | 1             | Optional                   | n/a   | Optional       | Optional      |
| XGS 116w | Optional 2 <sup>nd</sup> power supply | 1             | Optional                   | Built in<br>Optional 2 <sup>nd</sup> module | Optional       | Optional      |
| XGS 126  | Optional 2 <sup>nd</sup> power supply | 1             | Optional                   | n/a   | Optional       | Optional      |
| XGS 126w | Optional 2 <sup>nd</sup> power supply | 1             | Optional                   | Built in<br>Optional 2 <sup>nd</sup> module | Optional       | Optional      |
| XGS 136  | Optional 2 <sup>nd</sup> power supply | 1             | Optional                   | n/a   | Optional       | Optional      |
| XGS 136w | Optional 2 <sup>nd</sup> power supply | 1             | Optional                   | Built in<br>Optional 2 <sup>nd</sup> module | Optional       | Optional      |

## Flexi Port Modules for 1U and 2U

Configure your hardware to suit your infrastructure and change it as needed. Our optional Flexi Port LAN modules give you the freedom to select the connectivity you need: copper, fiber, 10GbE, and 40GbE – you decide.

| <i>XGS Rackmount Models</i>  | <i>For XGS 2xxx/3xxx/4xxx only</i>   | <i>For XGS 2U Rackmount Models only</i>  |
|--|--|--|
|  <p>8 Port 1G copper</p>  |  <p>4 Port 1G copper PoE + 4 Port 1G copper</p> |  <p>2 Port 40G QSFP+</p>  |
|  <p>8 Port 1G SFP</p>   |  <p>4 Port 2.5G copper PoE</p>                  |  <p>8 Port 10G SFP+</p>   |
|  <p>4 Port 10G SFP+</p>   |  |  <p>2 port 10 GbE Fiber (LC) bypass +<br/>4 port 10 GbE SFP+ Fiber</p>                  |
|  <p>4 Port 1G copper bypass (2 pairs)</p>                         |  |  <p>High-Density Flexi Port Module (NIC)<br/>12 Port 1G copper + 4 Port 2.5G copper</p> |
|  <p>2 port GbE Fiber (LC) bypass +<br/>4 port GbE SFP Fiber</p> |  |  |

Note: XGS modules are not compatible with any previous XG Series appliances

## XGS Series: 1U Accessory Matrix by Model

| Model    | Redundancy        |                        | Modular Connectivity |                 |  | Mounting                                       |
|----------|-------------------|------------------------|----------------------|-----------------|--|--|
|          | Power             | 2 <sup>nd</sup> SSD    | VDSL SFP Modem       | Flexi Port Bays | Flexi Port Modules   | Rackmount Kit                                  |
| XGS 2100 | Optional external | n/a                    | Optional             | 1               | <ul style="list-style-type: none"> <li>▸ 8 Port 1G copper</li> <li>▸ 8 Port 1G SFP</li> <li>▸ 4 Port 10G SFP+</li> <li>▸ 4 Port 1G copper bypass</li> <li>▸ 4 port 1G copper PoE</li> <li>▸ + 4 port 1G copper</li> <li>▸ 4 port 2.5G copper PoE</li> <li>▸ 2 port GbE Fiber (LC) bypass + 4 port GbE SFP Fiber</li> </ul> | Rackmount ears incl.<br>Optional sliding rails |
| XGS 2300 | Optional external | n/a                    | Optional             | 1               |  | Rackmount ears incl.<br>Optional sliding rails |
| XGS 3100 | Optional external | n/a                    | Optional             | 1               |  | Rackmount ears incl.<br>Optional sliding rails |
| XGS 3300 | Optional external | n/a                    | Optional             | 1               |  | Rackmount ears incl.<br>Optional sliding rails |
| XGS 4300 | Optional external | n/a                    | Optional             | 2               |  | Sliding rails included                         |
| XGS 4500 | Optional internal | Internal redundant SSD | Optional             | 2               |  | Sliding rails included                         |

## XGS Series: 2U Accessory Matrix by Model

| Model    | Redundancy |   | Modular Connectivity |                                |  | Mounting               |
|----------|------------|---|----------------------|--------------------------------|--|------------------------|
|          | Power      | SSD   | VDSL SFP Modem       | Flexi Port Bays                | Flexi Port Modules   | Rackmount Kit          |
| XGS 5500 | Included   | 2 <sup>nd</sup> redundant SSD included      | Optional             | 2 + 1 for High-density module  | <ul style="list-style-type: none"> <li>▸ 8 Port 1G copper</li> <li>▸ 8 Port 1G SFP</li> <li>▸ 4 Port 10G SFP+</li> <li>▸ 4 Port 1G copper bypass</li> <li>▸ 2 port 40G QSFP+</li> <li>▸ 8 port 10G SFP+</li> <li>▸ 2 port GbE Fiber (LC) bypass + 4 port GbE SFP Fiber</li> <li>▸ 2 port 10 GbE Fiber (LC) bypass + 4 port 10 GbE SFP+ Fiber</li> <li>▸ High-Density Flexi Port module (NIC) 12 Port 1G copper + 4 Port 2.5G copper</li> </ul> | Sliding rails included |
| XGS 6500 | Included   | 2 <sup>nd</sup> redundant SSD included      | Optional             | 2 + 2 for High-density modules |  | Sliding rails included |
| XGS 7500 | Included   | 2 <sup>nd</sup> redundant NVMe SSD included | Optional             | 2 + 2 for High-density modules |  | Sliding rails included |
| XGS 8500 | Included   | 2 <sup>nd</sup> redundant NVMe SSD included | Optional             | 2 + 2 for High-density modules |  | Sliding rails included |

# Sophos Wireless Protection

## Simple, Secure, Reliable

### Sophos offers three different options for wireless protection:

#### Firewall as a Controller

Using Sophos Firewall as a wireless controller, your Sophos access points are automatically discovered when they're connected, allowing you to configure a variety of corporate, guest, or contractor wireless networks quickly and easily. This option supports Wi-Fi 5 APX Series access points only.

#### Hardware Appliances with Integrated Wi-Fi





All our XGS Series desktop appliances are available with an integrated wireless access point. Coverage can be further extended by adding Sophos APX Series access points.

#### Cloud-Managed Wi-Fi

Our Sophos Central-managed wireless solution is the best option for greater scalability, enhanced security, and support for the latest technology with our Wi-Fi 6/6E AP6 Series access points. APX Series models are also supported.

#### Technical Specifications

Our indoor APX Series access points support Wi-Fi 5 (802.11ac Wave 2) and can be managed on premises from your firewall console. Management in the Sophos Central cloud platform is currently also available at no extra cost.

| Model                                | APX 120  | APX 320  | APX 530  | APX 740  |
|--------------------------------------|--|--|--|--|
|                                      |  |    |   |                                        |
| Deployment                           | Indoor; desktop, wall, or ceiling mount.   |  |  |  |
| WLAN Standards                       | 802.11 a/b/g/n/ac  |  |  |  |
| Radios                               | 1 x 2.4 GHz single band<br>1 x 5 GHz single band                                   | 1 x 2.4 GHz/5 GHz dual-band<br>1 x 5 GHz single band<br>1 x Bluetooth low energy [BLE - for future use]                      | 1 x 2.4 GHz single band<br>1 x 5 GHz single band<br>1 x Bluetooth low energy [BLE - for future use]                        |  |
| Antennas                             | 2 x internal dual-band antenna for Radio-1 and 2                                   | 2 x internal dual-band antenna for Radio-1<br>2 x internal 5 GHz antenna for Radio-2<br>1 x internal 2.4 GHz antenna for BLE | 3 x internal 2.4 GHz antenna for Radio-1<br>3 x internal 5 GHz antenna for Radio-2<br>1 x internal 2.4 GHz antenna for BLE | 4 x internal 2.4 GHz antenna for Radio-1<br>4 x internal 5 GHz antenna for Radio-2<br>1 x internal 2.4 GHz antenna for BLE |
| Performance                          | 2 x 2:2 MU-MIMO  |  | 3 x 3:3 MU-MIMO  | 4 x 4:4 MU-MIMO  |
| Interfaces                           | 1 x 12V DC-in<br>1 x RJ45 10/100/1000 Ethernet w/PoE                               | 1 x RJ45 connector console serial port<br>1 x RJ45 10/100/1000 Ethernet w/PoE  | 1 x RJ45 connector console serial port<br>1 x RJ45 10/100/1000 Ethernet port<br>1 x RJ45 10/100/1000 Ethernet w/PoE        |  |
| Power (max.)                         | 11.8W  | 11.5W  | 16.7W  | 22.4W  |
| Power-over-Ethernet (min.)           | PoE 802.3af  |  | PoE+ 802.3at   |  |
| Dimensions<br>Width x Height x Depth | 144 x 33.5 x 144 mm<br>5.67 x 1.32 x 5.67 inches                                   | 155 x 38 x 155 mm<br>6.11 x 1.5 x 6.11 inches  | 183 x 39 x 183 mm<br>7.21 x 1.54 x 7.21 inches   | 195 x 43 x 195 mm<br>7.68 x 1.7 x 7.68 inches  |
| Weight                               | 0.256 kg   | 0.474 kg   | 0.922 kg   | 1.012 kg   |

See [sophos.com/wireless](https://sophos.com/wireless) for further details about our wireless solutions.

## SD-RED



### Sophos SD-RED: Empowering Your SD-WAN Strategy

Sophos has long been a pioneer in providing an easy-to-use and secure way to connect branch offices and other remote locations. Sophos Firewall includes comprehensive SD-WAN features to help you accelerate application performance and get better visibility into network health to ensure that your remote locations enjoy the same performance as your main office.

Our SD-RED devices work with your Sophos Firewall independent of whether you have a hardware, software, or public cloud deployment. Our APX Series access points are also compatible with Sophos SD-RED.

To manage Sophos SD-RED, you need to have an active Network Protection subscription.

### Technical Specifications

| Model                                 | SD-RED 20   | SD-RED 60   |
|---------------------------------------|---|---|
|                                       |  |                                        |
| <b>Capacity</b>                       |   |   |
| Maximum throughput                    | 250 Mbps  | 850 Mbps  |
| <b>Physical interfaces (Built-in)</b> |   |   |
| LAN interfaces                        | 4 x 10/100/1000 Base-TX (1 GbE copper)  | 4 x 10/100/1000 Base-TX (1 GbE copper)  |
| WAN interfaces                        | 1 x 10/100/1000 Base-TX (shared with SFP)   | 2 x 10/100/1000 Base-TX (WAN1 shared port with SFP)   |
| SFP interfaces                        | 1x SFP fiber (shared port with WAN)   | 1x SFP fiber (shared port with WAN1)  |
| Power-over-Ethernet ports             | None  | 2 PoE ports (total power 30W)   |
| USB ports                             | 2 x USB 3.0 (front and rear)  | 2 x USB 3.0 (front and rear)  |
| COM ports                             | 1 x micro-USB   | 1 x micro-USB   |
| <b>Optional Connectivity</b>          |   |   |
| Modular bay                           | 1 (for use with optional Wi-Fi OR 4G/LTE card)                                    | 1 (for use with optional Wi-Fi OR 4G/LTE card)  |
| Optional Wi-Fi module                 | 802.11 a/b/g/n/ac Wave 1 (Wi-Fi 5) dual-band capable<br>2 x 2 MIMO 2 antennas     | 802.11 a/b/g/n/ac Wave 1 (Wi-Fi 5) dual-band capable<br>2 x 2 MIMO 2 antennas   |
| Optional 3G/4G LTE module             | MC7430/MC7455 Sierra Wireless Card  | MC7430/MC7455 Sierra Wireless Card  |
| Optional VDSL modem                   | Optional SFP modem (support coming in future release)                             | Optional SFP modem (support coming in future release)   |
| <b>Physical Specifications</b>        |   |   |
| Dimensions<br>Width x Height x Depth  | 225 x 44 x 150 mm<br>8.86 x 1.73 x 5.91 inches                                    | 225 x 44 x 150 mm<br>8.86 x 1.73 x 5.91 inches  |
| Weight                                | 0.9 kg/1.8 kg (1.98 lbs/3.97 lbs) Unpacked/Packed                                 | 1.0 kg/2.2 kg (2.2 lbs/4.85 lbs) Unpacked/Packed  |
| Power supply adapter                  | AC Input: 110-240VAC @50-60 Hz<br>DC Output: 12V +/- 10%, 3.7A, 40W               | AC Input: 110-240VAC @50-60 Hz<br>DC Output: 12V +/- 10%, 6.95A, 75W  |
| Power redundancy support              | Yes, optional second power supply   | Yes, optional second power supply   |
| Power consumption                     | 6.1W, 20.814 BTU (idle)<br>22.6W, 77.114 BTU (full load)                          | 11.88W, 40.536 BTU/h (idle)<br>25.33W, 86.429 BTU/h (full load without PoE)<br>62.48W, 213.190 BTU/h (full load with PoE) |
| Temperature (operational)             | 0°C to 40°C (32°F to 104°F)   | 0°C to 40°C (32°F to 104°F)   |
| Temperature (storage)                 | -20°C to 70°C (-4°F to 158°F)   | -20°C to 70°C (-4°F to 158°F)   |
| Humidity                              | 10% to 90%, non-condensing  | 10% to 90%, non-condensing  |
| <b>Safety Regulations</b>             |   |   |
| Certifications (safety, EMC, radio)   | CE/FCC/IC/RCM/VCCI/CB/UL/CCC/KC/ANATEL  | CE/FCC/IC/RCM/VCCI/CB/UL/CCC/KC/ANATEL  |

See [sophos.com/compare-xgs](https://sophos.com/compare-xgs) for further technical details.

# Sophos Switch

## Access Layer Switches

The Sophos Switch Series offers a range of network access layer switches to connect and power the devices connecting to your local area network (LAN) while adding security controls and segmentation at the all-important LAN edge. Our switches can be managed from Sophos Central alongside all of your Sophos solutions. A local user interface is also available.


## Technical Specifications

| 1G Models                                |  |
|--|--|
| 8-Port: CS101-8, CS101-8FP               | 8 x 1G, 2 x SFP. FP = Full PoE (110W)                                  |
| 24-Port: CS110-24, CS110-24FP            | 24 x 1G, 4 x SFP+. FP = Full PoE (410W)                                |
| 48-Port: CS110-48, CS110-48P, CS110-48FP | 48 x 1G, 4 x SFP+. P = Partial PoE (410W). FP = Full PoE (740W)        |
| 2.5G Models                              |  |
| 8-Port: CS210-8FP                        | 8 x 2.5G, 4 x SFP+. FP = Full PoE (240W). This model supports 802.3bt. |
| 24-Port: CS210-24FP                      | 16 x 1G, 8 x 2.5G, 4 x SFP+. FP = Full PoE (410W).                     |
| 48-Port: CS210-48FP                      | 32 x 1G, 16 x 2.5G, 4 x SFP+. FP = Full PoE (740W)                     |

## Deployment Options

While most 24- and 48-port models will find their future home in a rack, our entry-level 8-port models are also suitable for wall mounting or desktop use, making them the ideal choice for deployments outside of a standard data center environment. All of our switches come with a mounting kit.

See [sophos.com/switch](https://sophos.com/switch) for further details.

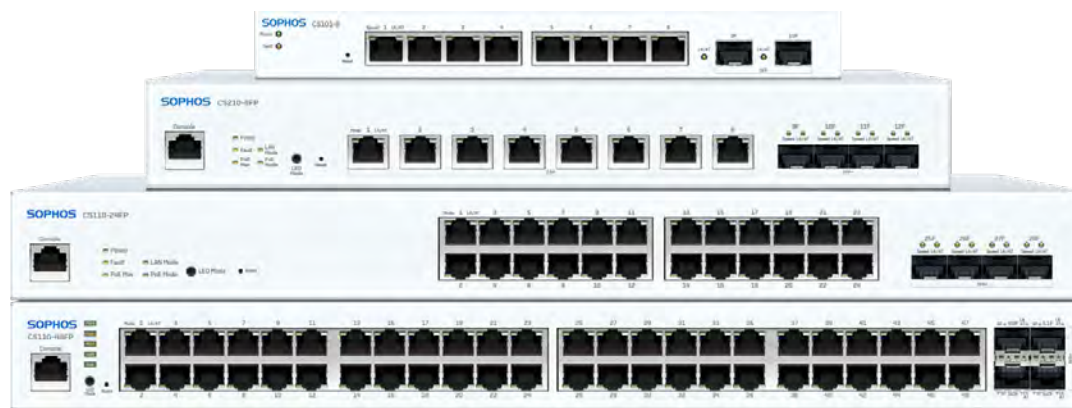



## Further Resources

We have a broad range of resources available where you can find out more about Sophos Firewall and related products.

- Sophos Firewall Web – [sophos.com/firewall](https://sophos.com/firewall)
- XGS Series Hardware models – [sophos.com/compare-xgs](https://sophos.com/compare-xgs)
- Sophos Firewall Ecosystem: Add-ons and accessories – [sophos.com/firewall-ecosystem](https://sophos.com/firewall-ecosystem)
- Sophos Switch - [sophos.com/switch](https://sophos.com/switch)
- Sophos Wireless – [sophos.com/wireless](https://sophos.com/wireless)
- Sophos Zero Trust Network Access - [sophos.com/ztna](https://sophos.com/ztna)
- Sophos Managed Detection and Response - [sophos.com/mdr](https://sophos.com/mdr)

## Try It for Free – for Business and Home Use

If you have any questions, visit [sophos.com](https://sophos.com) or give us a call.

### Free 30-Day Trial — No Strings Attached

If you'd like to take it for a test drive, you can get the full-featured product. Simply sign-up for our free 30-day trial.

### See It in Action Now

You can take a walkthrough of the user interface with our interactive demo or watch videos showing you just how we make network security simple.

Visit [sophos.com/firewall](https://sophos.com/firewall) for more information.

### Free Home Use Version

Our Sophos Firewall Home Edition is a fully equipped software version that gives you complete network, web, mail, and web application security with VPN functionality for home-use only and limited to four virtual cores and 6 GB of RAM. Visit [sophos.com/freetools](https://sophos.com/freetools) for more information.

United Kingdom and Worldwide Sales  
Tel: +44 (0)8447 671131  
Email: [sales@sophos.com](mailto:sales@sophos.com)

North American Sales  
Toll Free: 1-866-866-2802  
Email: [nasales@sophos.com](mailto:nasales@sophos.com)

Australia and New Zealand Sales  
Tel: +61 2 9409 9100  
Email: [sales@sophos.com.au](mailto:sales@sophos.com.au)

Asia Sales  
Tel: +65 62244168  
Email: [salesasia@sophos.com](mailto:salesasia@sophos.com)