

# IE340 Series

## Industrial Ethernet Layer 3 Switches

### Overview

IE340 Series access switches provide network infrastructure to digitally transform industry.

Allied Telesis IE340 Series switches are the perfect solution for access connectivity in industrial automation and control networks.

Their low latency, high availability and high capacity enables seamless integration with industrial applications, supporting multiple transmission streams. They are hardened to withstand difficult environmental conditions, such as electromagnetic noise, wide-ranging temperatures, high humidity, and vibration.

The IE340 Series provides network infrastructure for many vertical markets and related applications, such as:

#### ■ **Building automation**

Facility management including security and access control, fire protection, energy management, heating/ventilation/air-conditioning, and lighting control.

#### ■ **Cranes & Logistics**

Control of automated stacker cranes and other devices that boost the efficiency of dynamic warehouse environments.

#### ■ **Industrial automation and process control**

Interconnection of machines, IoT devices, sensors, and more. Instant communications between systems and people enables improved efficiency and resilience in manufacturing environments.

#### ■ **Marine control and monitoring**

Seamless communication for vessels, including high speed light water craft, and offshore units.

#### ■ **Railway transportation (signalling and telecommunications)**

Control signaling and telecommunication for improved safety, risk management, operating efficiency, and signage.

#### ■ **Railway transportation (traffic control)**

Adaptive traffic control, telematics, and preventive maintenance.

#### ■ **Smart cities**

Public space and urban infrastructure that provides safety and security, parking management, environmental metering, lighting, and information kiosks.

#### ■ **Wastewater treatment**

Industrial sewage treatment plants for efficient and reliable water purification. Control systems ensure process optimization by intelligent control, regulation, and monitoring.

### IT/OT convergence

Improve productivity and decision-making by integrating your operational technology (OT) and information technology (IT). Use the intelligence of Industry 4.0 to collect, analyze, and manage all your data in real time.

### Network automation and orchestration

Powerful automation options include Allied Telesis Autonomous Management Framework™ Plus (AMF Plus) and open standard-based northbound API.

For easy integration into complex networks consisting of physical, virtual, and multi-vendor devices, the IE340 Series features:

- NETCONF/RESTCONF + YANG data modelling for network automation.
- OpenFlow v1.3 for Software Defined Networking (SDN) orchestration.



### Key Features

- 100 Mbps<sup>1</sup> / 1Gbps uplink ports
- EMC for industrial plants
- AlliedWare Plus™ operating system
- Allied Telesis Autonomous Management Framework™ Plus (AMF Plus)
- NETCONF/RESTCONF with YANG data modelling
- OpenFlow v1.3 for SDN
- QoS with traffic shaping
- Efficient forwarding of multicast streams
- Routing capabilities (BGP, ECMP, OSPF, RIP, and static)
- Extensive features for cybersecurity and denial of service prevention
- Active Fiber Monitoring™ (AFM)
- High Availability networking (EPSRing™, ITU-T G.8032, MRP)
- Automation and control protocols (Modbus/TCP, PROFINET IO)
- Upstream Forwarding Only (UFO)
- IEEE 802.3at PoE+ sourcing (up to 30W)
- 240W PoE power budget with dynamic allocation
- Continuous PoE
- Extended operating temp range: -40° C to 75° C (tested @85° C)<sup>1</sup>
- Fanless design
- Graceful thermal shutdown
- Protection circuits
- Alarm monitoring with trigger facility
- Redundant power inputs
- Conformal coating

<sup>1</sup> Not supported on the IE340L model

# KEY FEATURES

## Network Automation

AMF Plus is a suite of tools that provide centralized control and network automation, as well as visual intent-based network management. It has the intelligence to set-up, optimize, and maintain the network according to predefined goals and policies.

Powerful features like centralized management, auto backup, auto upgrade, auto provisioning and auto recovery enable plug-and-play networking and zero touch management.

Integration with our Vista Manager visual monitoring and management platform means AMF Plus<sup>2</sup> also provides intent-based features like:

- Health monitoring to easily investigate, analyze and improve overall network health.
- Smart ACLs to control and secure the resources that clients use in the network.
- Intent-based QoS to deal with network bandwidth contention.

AMF Plus is scalable and can be either deployed integrated into Allied Telesis equipment, or on multi-tenant cloud architecture.

## Northbound Interfaces

Open standard-based interfaces allow for easy integration with existing management systems.

NETCONF/RESTCONF with YANG data modeling provides a standardized way to represent data and securely configure devices.

OpenFlow is a key technology for SDN orchestration. SDN controllers and other tools support automated behavior in a network, and allow for the execution of customized applications and services.

## Micro-segmentation for Network Security

Micro-segmentation enhances converged IT/OT network security by reducing the number of entry points for attackers or intruders. Isolating applications, data, and endpoints hampers the ability of intruders or malware to move within the network.

SDN network orchestration enables self-learning Artificial Intelligence to adapt and propagate security policies to mitigate evolving cyber threats.

## High Availability

EPSRing™ and ITU-T G.8032 ERPS enable a protected ring capable of recovery within as little as 50ms. These features are perfect for high performance and high availability.

High-availability automation networks are supported with Media Redundancy Protocol (MRP) as defined by IEC62439-2.

MRP used in ring networks allows up to 50 devices to have guaranteed and deterministic switchover behavior.

Spanning Tree protocols RSTP and MSTP, along with static LAGs and the dynamic Link Aggregation Control Protocol (LACP), support high availability in star network topologies.

<sup>2</sup> From AW+ 5.5.2-2 onwards, an AMF Plus license operating in the network provides all standard AMF network management and automation features, and also enables the AMF Plus intent-based networking features in Vista Manager EX (from version 3.10.1 onwards).

## Automation and Control Protocols

Automation and control protocols enable integration with OT supervisory and control systems.

PROFINET IO is a communication protocol for data exchange between I/O controllers, like SCADA and PLC, with I/O devices over Ethernet networks.

Supporting PROFINET certification, the IE340 Series has I/O device properties that provide diagnostic data.

The switches execute these communication channels:

- Standard TCP/IP (PROFINET NRT): suitable for non-deterministic functions such as parametrization, video/audio transmissions and data transfer to higher level IT systems.
- Real Time (PROFINET RT): TCP/IP layers are bypassed in order to have deterministic performance for automation applications.

Modbus/TCP is intended for supervision and control of automation equipment. It is a variant of the MODBUS protocol using TCP/IP for communications on Ethernet networks.

The IE340 Series supports read/write register access and heartbeat functionality for efficient process control of both SCADA and slave devices.

## Precise Time Synchronization (IEEE 1588)

Measurement and automation systems involving multiple devices often require accurate timing in order to facilitate event synchronization and data correlation. The IEEE 1588 Precise Time Protocol is a fault tolerant method enabling clock synchronization in a distributed system that communicates using an Ethernet network; this deterministic communication network is designed to provide precise timing for automation applications and measurement systems.

The IE340 Series supports IEEE 1588 (PTPv2) as a Transparent Clock, and performs an active role in Ethernet networks to reduce the effects of link delay and residence time..

## Quality of Service (QoS)

Comprehensive low-latency wire-speed QoS provides flow-based traffic management with full classification, prioritization, traffic shaping and min/max bandwidth profiles. Enjoy boosted network performance and guaranteed delivery of business-critical services and applications.

## sFlow

sFlow is an industry-standard technology for monitoring high-speed switched networks. It provides complete visibility into network use, enabling performance optimization, usage accounting/billing, and defense against security threats. Sampled packets sent to a collector ensure it always has a real-time view of network traffic.

## Active Fiber Monitoring (AFM)

Active Fiber Monitoring prevents eavesdropping on fiber communications by monitoring received optical power. If the switch detects an intruder, it can automatically shut down the port or transmit an alert.

## VLAN Mirroring (RSPAN)

VLAN mirroring allows traffic from a port on a remote switch to be analyzed locally. Traffic being transmitted or received on the port is duplicated and sent across the network on a special VLAN.

## VLAN Translation

VLAN Translation allows traffic arriving on a VLAN to be mapped to a different VLAN on the outgoing paired interface.

## VLAN Access Control List (ACLs)

ACLs simplify access and traffic control across entire segments of the network. They can be applied to a VLAN as well as a specific port.

## Upstream Forwarding Only (UFO)

UFO lets you manage which ports in a VLAN can communicate with each other, and which only have upstream access to services, for secure multi-user deployment.

## Dynamic Host Configuration Protocol (DHCP) Snooping

The switch keeps a record of the IP addresses of the devices on its ports, including those addresses allocated by DHCP servers. IP source guard checks against this DHCP snooping database to ensure only clients with specific IP and/or MAC addresses can access the network.

DHCP snooping works with other features, like dynamic ARP inspection, to increase security in Layer 2 switched environments, and also provides a traceable history which meets the growing legal requirements placed on service providers.

## Link Layer Discovery Protocol–Media Endpoint Discovery (LLDP-MED)

LLDP-MED extends LLDP basic network endpoint discovery and management functions. LLDP-MED allows for media endpoint specific messages, providing detailed information on power equipment, network policy, location discovery (for Emergency Call Services) and inventory.

## Power over Ethernet Plus (PoE+)

With PoE, a separate power connection to media endpoints is not necessary.

PoE+ reduces costs and gives even greater flexibility with up to 30W per port. This enables connecting high-power devices such as advanced security camera, kiosks, POS terminals, Wi-Fi access points, and LED light fixtures.

You may configure the overall PoE power budget to match the real capabilities of the external Power Supply Unit (PSU).

The PoE power budget may be allocated automatically and dynamically, based on the current usage of each powered device.

If the devices connected to a switch require more power than the switch can deliver, the switch will deny power to some ports, according to the assigned priority.

## Continuous PoE

Continuous PoE allows the switch to be restarted without affecting the supply of power to connected devices. Smart lighting, security cameras, and other PoE devices will continue to operate during a software upgrade on the switch.

## Port Based DHCP IP Address Assignment

DHCP server port-based address allocation ensures a replacement device receives the same IP address - even though the client-identifier or client hardware address has changed.

The supports Industrial Automation and Control Systems (IACS), which are very sensitive to operation outages. When devices such as sensors and actuators fail, the must be replaced immediately.

Assigning the same IP address to the replaced device allows the OT supervisory system to take control and resume operation as quickly as possible, minimizing downtime.

## Alarm Monitoring and Trigger facility

The IE340 Series alarm facility monitors the switch and responds to any problems.

Example of alarm events include:

- Main power supply failure
- Over-temperature
- Port link down
- Alarm Input
- System power budget exceeded
- PoE device exceeds port power budget

Triggers based on alarm changes provide a smart/friendly mechanism for automatic and timed management of your device by activating the execution of commands in response to certain events.

## Alarm Input/Output

Alarm Input and Output responds to an event instantly and automatically with predefined actions. The 2-pin terminal blocks may be connected to sensors and actuator relays.

Alarm Input receives signals from external devices like motion sensors and magnets that trigger specific actions when something changes.

Alarm Output controls external devices like strobes and sirens when an event occurs.

## Protection Circuits

Optimized protection circuits guard against the following abnormal conditions:

- Reverse input voltage polarity
- Over- and under-voltage
- Over-current, peak-current and short-circuit
- Over-temperature

## Enhanced Thermal Shutdown

Enhanced thermal shutdown acts to restrict PoE power and services when the switch exceeds a safe operating temperature.

The system restores operation when the temperature returns to acceptable levels.

## Dual power inputs

The redundant power inputs are for higher system reliability and to allow UPS emergency power over an extended period of time.

## Gigabit and Fast Ethernet SFP ports

The IE340 Series SFP ports support both Gigabit and Fast Ethernet Small Form-Factor Pluggables (SFPs).

This supports phasing in Gigabit fiber switches over time, allowing connectivity to legacy 100FX devices in the meantime. Supporting both speeds of SFP allows organizations to stay within budget as they migrate to faster technologies.

The IE340L supports Gigabit SFPs only.

## Conformal coating


The IE340 Series may be protected by conformal coating, which is a protective chemical coating or polymer film that 'conforms' to the circuit board topology. Its purpose is to create a barrier to air-borne contaminants from the operating environment thus preventing corrosion from protecting electronic circuits.

Some typical application examples include wastewater treatment and marine, where coatings are used to protect against various combinations of moisture, aggressive chemicals and vapors, salt sprays, large temperature variations, mechanical vibration, and even organic attack (e.g. fungus).

## Premium Software License

By default, the IE340 Series offers a comprehensive feature set that includes static routing. The feature set can easily be upgraded with premium software licenses.

## Industrial Network

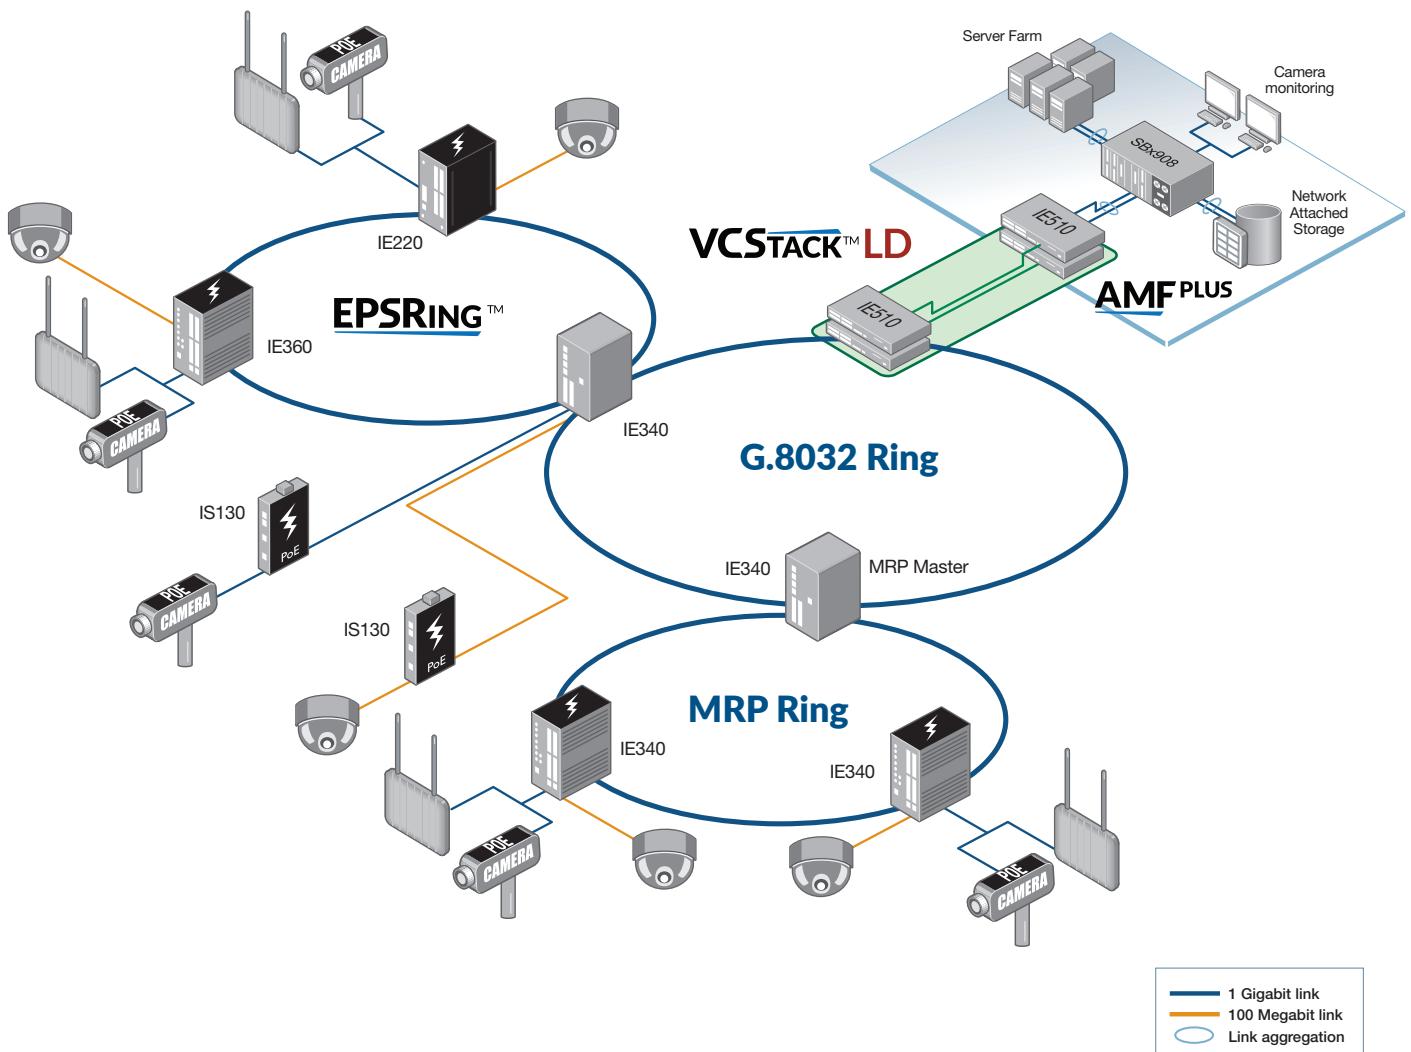

Media Redundancy Protocol (MRP), EPSRing and ERPS (ITU G.8032) provide high-speed resilient ring connectivity. This diagram shows how the IE Series can support a variety of ring network topologies.

The IE Series operates at a wide temperature range, and allows deployment in outdoor and harsh industrial environments.

PoE sourcing models support remotely controlled Pan, Tilt and Zoom (PTZ) video cameras, WiFi access points and more.

Management can be automated either with the Allied Telesis Autonomous Management Framework™ Plus (AMF Plus), or by 3<sup>rd</sup> party tools via the open standard northbound interface.

# SPECIFICATIONS

## Product Specifications

	10/100/1000T (RJ-45) Copper Ports	100M/1000X SFP Ports	1000X SFP Ports	Total Ports	PoE Enabled Ports	Switching Fabric	Forwarding Rate
<b>IE340-12GP</b>	8	4	-	12	8	24Gbps	17.8Mpps
<b>IE340-12GT</b>	8	4	-	12	-	24Gbps	17.8Mpps
<b>IE340-20GP</b>	16	4	-	20	16	40Gbps	29.7Mpps
<b>IE340L-18GP</b>	16	-	2	18	16	36Gbps	26.7Mpps

## Physical Specifications

	Width	Depth	Height	Weight	Enclosure	Mounting	Protection Rate
<b>IE340-12GP</b>	91 mm (3.58 in)	139 mm (5.47 in)	153 mm (6.027 in)	DIN rail: 2.34 kg (5.16 lbs) Wall mount: 2.23 kg (4.91 lbs)	Aluminum/ Sheet Metal shell	DIN rail, wall mount	IP30
<b>IE340-12GT</b>							
<b>IE340-20GP</b>							
<b>IE340L-18GP</b>							

## Power Characteristics

	Input Voltage <sup>3</sup>	Cooling	No PoE Load			Full PoE+ Load <sup>4</sup>		
			Max Power Consumption	Max Heat Dissipation	Noise	Max Power Consumption	Max Heat Dissipation	Noise
<b>IE340-12GP</b>	18~57V DC	Fanless	24W	81.9 BTU/h	--	271W	105.8 BTU/h	--
<b>IE340-12GT</b>						-	-	
<b>IE340-20GP</b>						271W	105.8 BTU/h	
<b>IE340L-18GP</b>						271W	105.8 BTU/h	

<sup>3</sup> PoE sourcing equipment require:  
48Vdc to enable IEEE802.3at Type 1 (PoE)  
54Vdc to enable IEEE802.3at Type 2 (PoE+)

<sup>4</sup> The Max Power consumption at full PoE load includes the powered device's consumption and margin. The cooling requirements of the switch are smaller than the power draw, because most of the load is dissipated at the PoE powered device and along the cabling. Use these wattage and BTU ratings for facility capacity planning.

## Power over Ethernet Sourcing Characteristics

	Enabled PoE Ports		Max PoE Power Budget <sup>5</sup>	Max PoE Sourcing Ports	
	PoE	PoE+		PoE (15W)	PoE+ (30W)
<b>IE340-12GP</b>	8	8	240W	8	8
<b>IE340-12GT</b>	-	-	-	-	-
<b>IE340-20GP</b>	16	16	240W	16	8
<b>IE340L-18GP</b>	16	16	240W	16	8

<sup>5</sup> The PoE power budget is shared among all ports; we recommend configuring dynamic PoE power allocation to optimize the power distribution

## Latency (microseconds)

	Port Speed	
	100Mbps	1Gbps
<b>IE340-12GP</b>	10.98μs	2.44μs
<b>IE340-12GT</b>	11.02μs	2.22μs
<b>IE340-20GP</b>	10.98μs	2.44μs
<b>IE340L-18GP</b>	11.02μs	2.22μs

## Performance

RAM memory	512MB DDR SDRAM
ROM memory	128MB flash
MAC address	16K entries
Packet Buffer	1.5 MBytes (16 Mbits)
Priority Queues	8
Simultaneous VLANs	4K
VLAN ID range	1~4094
Jumbo frames	9KB L2 jumbo frames
Multicast groups	511 (Layer 2), or 256 (Layer 2) and 256 (Layer 3) <sup>6</sup>

<sup>6</sup> When PIM is enabled.

## Other Interfaces

Type	Serial console (UART)
Port no.	1
Connector	RJ-45 female
Type	USB2.0 (Host Controller Class)
Port no.	1 <sup>6</sup>
Connector	Type A receptacle
Type	Alarm input (320μA @3.3Vdc)
Port no.	1
Connector	2-pin Terminal Block
Type	Alarm output (1A @30Vdc)
Port no.	1
Connector	2-pin Terminal Block

## Flexibility and Compatibility

- SFP ports support any combination of Allied Telesis 100Mbps and 1Gbps SFP modules listed in this document under Ordering Information

## Reliability

- Modular AlliedWare™ operating system
- Protection circuits against abnormal operations
- Redundant power input
- Full environmental monitoring of temperature and internal voltage levels
- Enhanced Thermal Shutdown

## Industrial Automation

- IEEE 1588 PTP one-step variant
- IEEE 1588 PTP two-step variant
- IEEE 1588 PTP End-to-End Transparent Clock
- IEEE 1588 PTP Peer-to-Peer Transparent Clock
- IEEE 1588 PTP profile: Default
- Modbus/TCP with master/slave heartbeats facility
- PROFINET IO non-real-time and real-time (NRT/RT)

## Management Features

- Allied Telesis Autonomous Management Framework™ Plus (AMF Plus) node
- NETCONF/RESTCONF northbound interface with YANG data modelling
- OpenFlow northbound interface
- Web-based Graphical User Interface (GUI)
- Industry-standard CLI with context-sensitive help
- Powerful CLI scripting engine
- Built-in text editor
- Event-based triggers allow user-defined scripts to be executed upon selected system events
- Link Layer Discovery Protocol (LLDP)
- Link Layer Discovery Protocol - Media Endpoint Discovery (LLDP-MED)
- SNMPv1/v2c/v3 support
- Comprehensive SNMP MIB support for standard based device management
- Console management port on the front panel for ease of access
- Front panel LEDs provide at-a-glance PSU status, PoE status, and fault information
- Eco-friendly mode allows ports and LEDs to be disabled to save power
- USB interface allows software release files, configurations, and other files to be stored for backup and distribution to other devices
- Recessed Reset button

## IPv4 Features

- Black hole routing
- Directed broadcast forwarding
- Equal Cost Multi Path (ECMP) routing
- Dynamic routing (OSPF, RIP, and BGP)
- Static unicast and multicast routes for IPv4
- UDP broadcast helper (IP helper)

## IPv6 Features

- Device management over IPv6 networks with SNMPv6, Telnetv6 and SSHv6
- IPv4 and IPv6 dual stack
- IPv6 hardware ACLs

- Dynamic routing (OSPFv3, RIPng, and BGP+)
- Static unicast routing for IPv6
- IPv6 Ready certified

## Multicasting Features

- Internet Group Management Protocol (IGMPv1/v2/v3)
- IGMP snooping with fast leave
- IGMP query solicitation
- Multicast Listener Discovery (MLDv1/v2)
- MLDv2 for IPv6
- MLD snooping
- IGMP/MLD proxy (multicast forwarding)
- Protocol Independent Multicast - Dense Mode (PIM-DM)
- Protocol Independent Multicast - Sparse Mode (PIM-SM)

## Quality of Service

- 8 priority queues with a hierarchy of high priority queues for real-time traffic, and mixed scheduling, for each switch port
- Extensive remarking capabilities
- IP precedence and DiffServ marking based on Layer 2, 3 and 4 headers
- Limit bandwidth per port or per traffic class down to 64kbps
- Policy-based QoS and traffic shaping
- Policy-based QoS based on VLAN, port, MAC and general packet classifiers
- Policy-based storm protection
- Strict priority, weighted round robin or mixed scheduling
- Taildrop for queue congestion control
- Wirespeed traffic classification with low latency for real-time streaming media applications

## Resiliency Features

- Control Plane Prioritization (CPP) ensures the CPU always has sufficient bandwidth to process network control traffic
- Dynamic link failover (host attach)
- Ethernet Protection Switching Ring (EPSR) with SuperLoop Prevention (EPSR-SLP)
- Ethernet Ring Protection Switching (ITU-T G.8032 ERPS)
- Link Aggregation Control Protocol (LACP)
- Loop detection and thrash limiting
- Media Redundancy Protocol (MRP)
- Multiple Spanning Tree Protocol (MSTP)
- PVST+ compatibility mode
- Rapid Spanning Tree Protocol (RSTP)
- Router Redundancy Protocol (RRP) snooping
- Spanning Tree Protocol (STP) root guard
- Virtual Router Redundancy Protocol (VRRPv3)

## Security Features

- Access Control Lists (ACLs) based on layer 3 and 4 headers
- Authentication, Authorization and Accounting (AAA)
- Auth-fail and guest VLANs
- Configurable ACLs for management traffic
- BPDU protection

- DHCP snooping, IP source guard and Dynamic ARP Inspection (DAI)
- DoS attack blocking and virus throttling
- Dynamic VLAN assignment
- HTTP over TLS (HTTPS)
- MAC address filtering and MAC address lockdown
- Network Access and Control (NAC) features manage endpoint security
- Password protected bootloader
- Port-based learn limits (intrusion detection)
- Private VLANs and port isolation for multiple customers using the same VLAN
- RADIUS local server (100 users) and accounting
- Secure Copy (SCP)
- Strong password security and encryption
- TACACS+ authentication and accounting
- Tri-authentication: MAC-based, web-based and IEEE 802.1X

## Virtual LAN Features

- Generic VLAN Registration Protocol (GVRP)
- VLAN stacking, Q-in-Q
- VLAN translation
- Upstream Forwarding Only (UFO)

## Services

- Domain Name System (DNS) client and relay
- DNSv6 client and relay
- Dynamic Host Configuration Protocol (DHCP) server and relay
- DHCPv6 server and relay
- HyperText Transfer Protocol (HTTP/1.1)
- Network Time Protocol (NTP) for IPv4 and IPv6
- Simple Mail Transfer Protocol (SMTP)
- Secure Shell (SSHv2/v3)
- TELNET
- Trivial File Transfer Protocol (TFTP)

## Diagnostic Tools

- Active Fiber Monitoring (AFM) detects tampering on optical links
- Automatic link flap detection and port shutdown
- Built-In Self-Test (BIST)
- Cable fault locator (TDR)
- Connectivity Fault Management (CFM), Continuity Check Protocol (CCP) for use with ITU-T G.8032 ERPS
- Event logging via Syslog over IPv4
- Find-me device locator
- Optical Digital Diagnostic Monitoring (DDM)
- Ping polling for IPv4 and IPv6
- Port mirroring
  - No limit on mirrored ports
  - Up to 4 mirror (analyzer) ports for received traffic
  - 1 mirror (analyzer) port for transmitted traffic
- VLAN mirroring (RSPAN)
- sFlow
- TraceRoute for IPv4 and IPv6
- UniDirectional Link Detection (UDLD)

<sup>7</sup> Coming in a later firmware release. Contact Sales representative for availability

## Environmental Specifications

### ■ Operating temperature range:<sup>8</sup>

IE340 model:

-40°C to 75°C (-40°F to 167°F)<sup>9</sup>

IE340L model:

-40°C to 65°C (-40°F to 149°F)

### ■ Storage temperature range:

-40°C to 85°C (-40°F to 185°F)

### ■ Operating humidity range:

5% to 95% non-condensing

### ■ Storage humidity range:

5% to 95% non-condensing

### ■ Operating altitude:

3,000 meters maximum (9,843 ft)

## Mechanical

### ■ EN 50022, EN 60715 standardized mounting on rails

## Warranty

### ■ Refer to the Term & Policies page on the Allied Telesis web site.

Compliance	IE340	IE340L
Compliance Mark	CE, FCC, ICES, IPv6 Ready, RCM, TEC, UKCA, UL, VCCI	
Hazardous Substances Compliance	RoHS, China-RoHS, JGSSI, REACH, SCIP, TSCA, WEEE	
Safety <sup>10</sup>	AS/NZS 62368-1 CAN/CSA C22.2 No.60950-22 CAN/CSA C22.2 No.61010-1 CAN/CSA C22.2 No.62368-1 EN/IEC/UL 60950-22 EN/IEC/UL 61010-1 EN/IEC/UL 61010-2-201 EN/IEC/UL 62368-1	CAN/CSA C22.2 No.60950-22 CAN/CSA C22.2 No.62368-1 EN/IEC/UL 60950-22 EN/IEC/UL 62368-1
Electromagnetic Immunity	EN 55035 EN 61000-6-2	
Harmonic current emission	EN/IEC 61000-3-2 <sup>10</sup>	
Voltage fluctuation and flicker	EN/IEC 61000-3-3 <sup>10</sup>	
Electrostatic discharge (ESD)	EN/IEC 61000-4-2, level 3	
Radiated susceptibility (RS)	EN/IEC 61000-4-3, level 3, level x (20V/m)	
Electrical fast transient (EFT)	EN/IEC 61000-4-4, Signal port: level 4 DC power port: level 3 Earth port: level 2	
Lighting/surge immunity (Surge)	EN/IEC 61000-4-5, installation class 3 for outdoor Signal port: level 3 (L-E) DC power port: level 3 (L-E, R-E), level 2 (L-L)	
Conducted immunity (CS)	EN/IEC 61000-4-6, level 3	
Magnetic field	EN/IEC 61000-4-8, level 4	
AC voltage dips and interruption	EN/IEC 61000-4-11 <sup>10</sup>	
DC voltage dips and Interruption	EN/IEC 61000-4-29 <sup>11</sup>	
Electromagnetic Emissions	AS/NZS CISPR 32, class A CISPR 11, group 1, class A CISPR 32, class A EN 55032, class A EN 61000-6-4, class A FCC 47 CFR Part 15, subpart B, class A ICES 003 class A VCCI class A	
Industry		
Marine	DNV <sup>11</sup>	-
Measurement, control and laboratory use	EN/IEC 61326-1	-
PROFINET IO	PROFIBUS certificate no. Z14174, Z14199, Z14200 PROFINET IO device, Conformance Class B add-on features: MRP Client, MRP Manager	
Programmable controller	EN/IEC 61131-2	-
Railway applications	EN 50121-4 (S/T apparatus)	
Traffic controller assemblies	NEMA TS 2	
Environmental		
Corrosive	ANSI/ISA S71.04, severity class G3 <sup>8</sup>	
Freefall	IEC60068-2-31, class T2.3	
Shock	IEC60068-2-27 operational: 20g, 11ms, half-sine (DIN rail mount) 45g, 11ms, half-sine (wall mount) non-operational: 65g, 11ms, half-sine	
Vibration	IEC60068-2-6 operational: 2g @10~500Hz non-operational: 2g	

<sup>8</sup> Refer to the Installation Guide for the full list of environmental tests.

<sup>9</sup> Refer to the Installation Guide for more details on the safety approved power ratings and thermal conditions.

<sup>10</sup> Test was applied using the power supply AT-IE048-480-20.

<sup>11</sup> Available on models with conformal coating.

# STANDARDS & PROTOCOLS

## AlliedWare Plus Operating System

Version 5.5.5-2

### Authentication

- RFC 1321 MD5 Message-Digest algorithm
- RFC 1828 IP authentication using keyed MD5

### Automation and Control

- Modbus/TCP
- IEC 61158 Industrial communication networks - Fieldbus specifications - PROFINET
- IEC 61784 Industrial communication networks - communication profile - PROFINET
- IEEE 1588-2019 Precision Clock Synchronization Protocol

### Border Gateway Protocol (BGP)

- BGP dynamic capability
- BGP outbound route filtering
- RFC 1772 Application of the Border Gateway Protocol (BGP) in the Internet
- RFC 1997 BGP communities attribute
- RFC 2439 BGP route flap damping
- RFC 2545 Use of BGP-4 multiprotocol extensions for IPv6 inter-domain routing
- RFC 2918 Route refresh capability for BGP-4
- RFC 3882 Configuring BGP to block Denial-of-Service (DoS) attacks
- RFC 4271 Border Gateway Protocol 4 (BGP-4)
- RFC 4360 BGP extended communities
- RFC 4456 BGP route reflection - an alternative to full mesh iBGP
- RFC 4724 BGP graceful restart
- RFC 4760 Multiprotocol Extensions for BGP-4
- RFC 5065 Autonomous system confederations for BGP
- RFC 5492 Capabilities Advertisement with BGP-4
- RFC 5925 The TCP Authentication Option
- RFC 6793 BGP Support for Four-Octet Autonomous System (AS) Number Space
- RFC 7606 Revised Error Handling for BGP UPDATE Messages

### Encryption (Management Traffic Only)

- FIPS 180-1 Secure Hash standard (SHA-1)
- FIPS 186 Digital signature standard (RSA)
- FIPS 46-3 Data Encryption Standard (DES and 3DES)

### Ethernet

- IEEE 802.2 Logical Link Control (LLC)
- IEEE 802.3 Ethernet
- IEEE 802.3ab 1000BASE-T
- IEEE 802.3af Power over Ethernet (PoE)
- IEEE 802.3at Power over Ethernet up to 30W (PoE+)
- IEEE 802.3az Energy Efficient Ethernet (EEE)
- IEEE 802.3u 100BASE-X
- IEEE 802.3x Flow control - full-duplex operation
- IEEE 802.3z 1000BASE-X

### IPv4 Features

- RFC 768 User Datagram Protocol (UDP)
- RFC 791 Internet Protocol (IP)
- RFC 792 Internet Control Message Protocol (ICMP)
- RFC 793 Transmission Control Protocol (TCP)
- RFC 826 Address Resolution Protocol (ARP)
- RFC 894 Standard for the transmission of IP datagrams over Ethernet networks
- RFC 919 Broadcasting Internet datagrams
- RFC 922 Broadcasting Internet datagrams in the presence of subnets
- RFC 932 Subnetwork addressing scheme
- RFC 950 Internet standard subnetting procedure
- RFC 951 Bootstrap Protocol (BootP)
- RFC 1027 Proxy ARP
- RFC 1035 DNS client
- RFC 1042 Standard for the transmission of IP datagrams over IEEE 802 networks
- RFC 1071 Computing the Internet checksum
- RFC 1122 Internet host requirements
- RFC 1191 Path MTU discovery
- RFC 1256 ICMP router discovery messages

- RFC 1518 An architecture for IP address allocation with CIDR
- RFC 1519 Classless Inter-Domain Routing (CIDR)
- RFC 1542 Clarifications and extensions for BootP
- RFC 1591 Domain Name System (DNS)
- RFC 1812 Requirements for IPv4 routers
- RFC 1918 IP addressing
- RFC 2581 TCP congestion control

### IPv6 Features

- RFC 1981 Path MTU discovery for IPv6
- RFC 2460 IPv6 specification
- RFC 2464 Transmission of IPv6 packets over Ethernet networks
- RFC 3484 Default address selection for IPv6
- RFC 3587 IPv6 global unicast address format
- RFC 3596 DNS extensions to support IPv6
- RFC 4007 IPv6 scoped address architecture
- RFC 4193 Unique local IPv6 unicast addresses
- RFC 4213 Transition mechanisms for IPv6 hosts and routers
- RFC 4291 IPv6 addressing architecture
- RFC 4443 Internet Control Message Protocol (ICMPv6)
- RFC 4861 Neighbor discovery for IPv6
- RFC 4862 IPv6 Stateless Address Auto-Configuration (SLAAC)
- RFC 5014 IPv6 socket API for source address selection
- RFC 5095 Deprecation of type 0 routing headers in IPv6
- RFC 5175 IPv6 Router Advertisement (RA) flags option
- RFC 6105 IPv6 Router Advertisement (RA) guard

### Management

- AT Enterprise MIB including AMF Plus MIB and traps
- Optical DDM MIB
- SNMPv1, v2c and v3
- ANSI/TIA-1057 Link Layer Discovery Protocol-Media Endpoint Discovery (LLDP-MED)
- IEEE 802.1AB Link Layer Discovery Protocol (LLDP)
- RFC 1155 Structure and identification of management information for TCP/IP-based Internets
- RFC 1157 Simple Network Management Protocol (SNMP)
- RFC 1212 Concise MIB definitions
- RFC 1213 MIB for network management of TCP/IP-based Internets: MIB-II
- RFC 1215 Convention for defining traps for use with the SNMP
- RFC 1227 SNMP MUX protocol and MIB
- RFC 1239 Standard MIB
- RFC 1724 RIPv2 MIB extension
- RFC 2011 SNMPv2 MIB for IP using SMIv2
- RFC 2012 SNMPv2 MIB for TCP using SMIv2
- RFC 2013 SNMPv2 MIB for UDP using SMIv2
- RFC 2578 Structure of Management Information v2 (SMIv2)
- RFC 2579 Textual conventions for SMIv2
- RFC 2580 Conformance statements for SMIv2
- RFC 2674 Definitions of managed objects for bridges with traffic classes, multicast filtering and VLAN extensions
- RFC 2741 Agent extensibility (AgentX) protocol
- RFC 2819 RMON MIB (groups 1,2,3 and 9)
- RFC 2863 Interfaces group MIB
- RFC 3176 sFlow: a method for monitoring traffic in switched and routed networks
- RFC 3411 An architecture for describing SNMP management frameworks
- RFC 3412 Message processing and dispatching for the SNMP
- RFC 3413 SNMP applications
- RFC 3414 User-based Security Model (USM) for SNMPv3
- RFC 3415 View-based Access Control Model (VACM) for SNMP
- RFC 3416 Version 2 of the protocol operations for the SNMP
- RFC 3417 Transport mappings for the SNMP
- RFC 3418 MIB for SNMP
- RFC 3621 Power over Ethernet (PoE) MIB
- RFC 3635 Definitions of managed objects for the Ethernet-like interface types
- RFC 3636 IEEE 802.3 MAU MIB
- RFC 4022 MIB for the Transmission Control Protocol (TCP)
- RFC 4113 MIB for the User Datagram Protocol (UDP)
- RFC 4188 Definitions of managed objects for bridges

- RFC 4292 IP forwarding table MIB
- RFC 4293 MIB for the Internet Protocol (IP)
- RFC 4318 Definitions of managed objects for bridges with RSTP
- RFC 4560 Definitions of managed objects for remote ping, traceroute and lookup operations
- RFC 5424 The Syslog protocol
- RFC 6527 Definitions of managed objects for VRRPv3

### Multicast Support

- Bootstrap Router (BSR) mechanism for PIM-SM
- IGMP query solicitation
- IGMP snooping (IGMPv1, v2 and v3)
- IGMP snooping fast-leave
- IGMP/MLD multicast forwarding (IGMP/MLD proxy)
- MLD snooping (MLDv1 and v2)
- PIM-SM and SSM for IPv6
- RFC 2236 Internet Group Management Protocol v2 (IGMPv2)
- RFC 2710 Multicast Listener Discovery (MLD) for IPv6
- RFC 2715 Interoperability rules for multicast routing protocols
- RFC 3306 Unicast-prefix-based IPv6 multicast addresses
- RFC 3376 IGMPv3
- RFC 3590 Source Address Selection for the Multicast Listener Discovery (MLD) Protocol
- RFC 3810 Multicast Listener Discovery v2 (MLDv2) for IPv6
- RFC 3956 Embedding the Rendezvous Point (RP) address in an IPv6 multicast address
- RFC 3973 PIM Dense Mode (DM)
- RFC 4541 IGMP and MLD snooping switches
- RFC 4604 Using IGMPv3 and MLDv2 for source-specific multicast
- RFC 4607 Source-specific multicast for IP
- RFC 7761 Protocol Independent Multicast - Sparse Mode (PIM-SM): Protocol specification

### Open Shortest Path First (OSPF)

- OSPF link-local signaling
- OSPF MD5 authentication
- OSPF restart signaling
- Out-of-band LSDB resync
- RFC 1245 OSPF protocol analysis
- RFC 1246 Experience with the OSPF protocol
- RFC 1370 Applicability statement for OSPF
- RFC 1765 OSPF database overflow
- RFC 2328 OSPFv2
- RFC 2370 OSPF opaque LSA option
- RFC 2740 OSPFv3 for IPv6
- RFC 3101 OSPF Not-So-Stubby Area (NSSA) option
- RFC 3509 Alternative implementations of OSPF area border routers
- RFC 3623 Graceful OSPF restart
- RFC 3630 Traffic engineering extensions to OSPF
- RFC 4552 Authentication/confidentiality for OSPFv3
- RFC 5329 Traffic engineering extensions to OSPFv3
- RFC 5340 OSPFv3 for IPv6 (partial support)

### Quality of Service (QoS)

- IEEE 802.1p Priority tagging
- RFC 2211 Specification of the controlled-load network element service
- RFC 2474 DiffServ precedence for eight queues/port
- RFC 2475 DiffServ architecture
- RFC 2597 DiffServ Assured Forwarding (AF)
- RFC 2697 A single-rate three-color marker
- RFC 2698 A two-rate three-color marker
- RFC 3246 DiffServ Expedited Forwarding (EF)

### Resiliency Features

- IEC 62439-2 Media Redundancy Protocol (MRP)
- IEEE 802.3ad Static and dynamic link aggregation
- IEEE 802.1ag CFM Continuity Check Protocol (CCP)
- IEEE 802.1AX Link aggregation (static and LACP)
- IEEE 802.1D MAC bridges
- IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)
- IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
- ITU-T G.8032 / Y.1344 Ethernet Ring Protection Switching (ERPS)
- RFC 5798 Virtual Router Redundancy Protocol version 3 (VRRPv3) for IPv4 and IPv6

## Routing Information Protocol (RIP)

- RFC 1058 Routing Information Protocol (RIP)
- RFC 2080 RIPng for IPv6
- RFC 2081 RIPng protocol applicability statement
- RFC 2082 RIP-2 MD5 authentication
- RFC 2453 RIPv2

## Security Features

- SSH remote login
- SSLv2 and SSLv3
- TACACS+ Accounting, Authentication, Authorization (AAA)
- IEEE 802.1X Authentication protocols (TLS, TTLS, PEAP and MD5)
- IEEE 802.1X Multi-supplicant authentication
- IEEE 802.1X Port-based network access control
- RFC 2818 HTTP over TLS ("HTTPS")
- RFC 2865 RADIUS authentication
- RFC 2866 RADIUS accounting
- RFC 2868 RADIUS attributes for tunnel protocol support
- RFC 2986 PKCS #10: certification request syntax specification v1.7
- RFC 3579 RADIUS support for Extensible Authentication Protocol (EAP)
- RFC 3580 IEEE 802.1x RADIUS usage guidelines
- RFC 3748 Extensible Authentication Protocol (EAP)
- RFC 4251 Secure Shell (SSHv2) protocol architecture
- RFC 4252 Secure Shell (SSHv2) authentication protocol
- RFC 4253 Secure Shell (SSHv2) transport layer protocol
- RFC 4254 Secure Shell (SSHv2) connection protocol
- RFC 5176 RADIUS CoA (Change of Authorization)
- RFC 5246 Transport Layer Security (TLS) v1.2
- RFC 5280 X.509 certificate and Certificate Revocation List (CRL) profile
- RFC 5425 Transport Layer Security (TLS) transport mapping for Syslog
- RFC 5656 Elliptic curve algorithm integration for SSH
- RFC 6125 Domain-based application service identity within PKI using X.509 certificates with TLS
- RFC 6614 Transport Layer Security (TLS) encryption for RADIUS
- RFC 6668 SHA-2 data integrity verification for SSH

## Services

- RFC 854 Telnet protocol specification
- RFC 855 Telnet option specifications
- RFC 857 Telnet echo option
- RFC 858 Telnet suppress go ahead option
- RFC 1091 Telnet terminal-type option
- RFC 1350 The TFTP protocol (revision 2)
- RFC 1985 SMTP service extension
- RFC 2049 MIME
- RFC 2131 DHCPv4 (server, relay and client)
- RFC 2132 DHCP options and BootP vendor extensions
- RFC 2616 Hypertext Transfer Protocol - HTTP/1.1
- RFC 2821 Simple Mail Transfer Protocol (SMTP)
- RFC 2822 Internet message format
- RFC 3046 DHCP relay agent information option (DHCP option 82)
- RFC 3315 Dynamic Host Configuration Protocol for IPv6 (DHCPv6)
- RFC 3396 Encoding Long Options in the Dynamic Host Configuration Protocol (DHCPv4)
- RFC 3633 IPv6 prefix options for DHCPv6
- RFC 3646 DNS configuration options for DHCPv6
- RFC 3993 Subscriber-ID suboption for DHCP relay agent option
- RFC 4954 SMTP Service Extension for Authentication
- RFC 5905 Network Time Protocol (NTP) version 4

## VLAN LAN Features

Generic VLAN Registration Protocol (GVRP)

Voice VLAN

IEEE 802.1ad Provider bridges (VLAN stacking, Q-in-Q)

IEEE 802.1Q Virtual LAN (VLAN) bridges

IEEE 802.1v VLAN classification by protocol and port

IEEE 802.3ac VLAN tagging

## FEATURE LICENSES

	Description	Includes
<b>AT-IE340-FL01</b>	IE340 Series Premium license	<ul style="list-style-type: none"> <li>BGP (64 routes)</li> <li>BGP+ (64 routes)</li> <li>OSPF (64 routes)</li> <li>OSPFv3 (64 routes)</li> <li>PIM-SM, DM and SSM (256 routes)</li> <li>PIMv6-SM and SSM (256 routes)</li> <li>RIP (64 routes)</li> <li>RIPng (64 routes)</li> </ul>

## ORDERING INFORMATION

The DIN rail and wall mount kits are included. The management serial console cable is NOT included

<b>AT-IE340-12GP-xx<sup>12</sup></b>	8x 10/100/1000T, 4x 100/1000X SFP, Industrial Ethernet, Layer 3 Switch, PoE+ Support
<b>AT-IE340-12GP/C-980</b>	8x 10/100/1000T, 4x 100/1000X SFP, Industrial Ethernet, Layer 3 Switch, PoE+ Support, Conformal Coating
<b>AT-IE340-12GT-xx<sup>12</sup></b>	8x 10/100/1000T, 4x 100/1000X SFP, Industrial Ethernet, Layer 3 Switch
<b>AT-IE340-20GP-xx<sup>12</sup></b>	16x 10/100/1000T, 4x 100/1000X SFP, Industrial Ethernet, Layer 3 Switch, PoE+ Support
<b>AT-IE340-20GP/C-980</b>	16x 10/100/1000T, 4x 100/1000X SFP, Industrial Ethernet, Layer 3 Switch, PoE+ Support, Conformal Coating
<b>AT-IE340-18GP-80</b>	16x 10/100/1000T, 2x 1000X SFP, Industrial Ethernet, Layer 3 Switch, PoE+ Support

Where xx = 80 standard Country of Origin

980 TAA compliant Country of Origin

<sup>12</sup> Trade Act Agreement compliant (TAA)

Power Supplies	
AT-DRB50-48-1	50W @48Vdc, Industrial AC/DC power supply, DIN rail mount
AT-IE048-120-20	120W @48Vdc, Industrial AC/DC power supply, DIN rail mount (5 years warranty)
AT-IE048-240-20	240W @48Vdc, Industrial AC/DC power supply, DIN rail mount (5 years warranty)
AT-IE048-480-20	480W @48Vdc, Industrial AC/DC power supply, DIN rail mount (5 years warranty)
AT-IE048-480/C-20	480W @48Vdc, Industrial AC/DC power supply, DIN rail mount, Conformal Coating (5 years warranty)
AT-SDR120-48	120W @48Vdc, Industrial AC/DC power supply, DIN rail mount
AT-SDR240-48	240W @48Vdc, Industrial AC/DC power supply, DIN rail mount
AT-SDR480-48	480W @48Vdc, Industrial AC/DC power supply, DIN rail mount

## Accessories

Refer to the installation guide for the recommended Maximum Operating Temperature according to the selected SFP module.

AT-VT-Kit3	Management cable (USB to serial console)
<b>1000Mbps SFP Modules</b>	
AT-SPBD10-13	10 km, 1G BiDi SFP, LC, SMF, I-Temp (1310 Tx/1490 Rx)
AT-SPBD10-14	10 km, 1G BiDi SFP, LC, SMF, I-Temp (1490 Tx/1310 Rx)
AT-SPBD20-13/I	20 km, 1G BiDi SFP, SC, SMF, I-Temp, (1310 Tx/1490 Rx)
AT-SPBD20-14/I	20 km, 1G BiDi SFP, SC, SMF, I-Temp, (1490 Tx/1310 Rx)
AT-SPBD20LC/I-13	20 km, 1G BiDi SFP, LC, SMF, I-Temp, TAA <sup>13</sup> (1310 Tx/1490 Rx)
AT-SPBD20LC/I-14	20 km, 1G BiDi SFP, LC, SMF, I-Temp, TAA <sup>13</sup> (1490 Tx/1310 Rx)
AT-SPBD40-13/I	40 km, 1G BiDi SFP, LC, SMF, I-Temp, (1310 Tx/1490 Rx)
AT-SPBD40-14/I	40 km, 1G BiDi SFP, LC, SMF, I-Temp, (1490 Tx/ 1310 Rx)
AT-SPEX/E-90	2 km, 1000EX SFP, LC, MMF, 1310 nm, Ext. Temp, TAA <sup>12</sup>
AT-SPLX10a	10 km, 1000LX SFP, LC, SMF, 1310 nm, TAA <sup>12</sup>
AT-SPLX10/I	10 km, 1000LX SFP, LC, SMF, 1310 nm, I-Temp

AT-SPLX10/E-90	10 km, 1000LX SFP, LC, SMF, 1310 nm, Ext. Temp, TAA <sup>12</sup>
AT-SPLX40	40 km, 1000LX SFP, LC, SMF, 1310 nm
AT-SPLX40/E-90	10 km, 1000LX SFP, LC, SMF, 1310 nm, Ext. Temp, TAA <sup>12</sup>
AT-SPSX-90	550 m, 1000SX SFP, LC, MMF, 850 nm, TAA <sup>12</sup>
AT-SPSX/I-90	550 m, 1000SX SFP, LC, MMF, 850 nm, I-Temp, TAA <sup>12</sup>
AT-SPSX/E-90	550 m, 1000SX SFP, LC, MMF, 850 nm, Ext. Temp, TAA <sup>12</sup>
AT-SPTX-90	100 m, 10/100/1000T SFP, RJ-45, TAA <sup>12</sup>
AT-SPTX/I	100 m, 10/100/1000T SFP, RJ-45, I-Temp
AT-SPZX120/I	120 km, 1000LX SFP, LC, SMF, 1550 nm, I-Temp, TAA <sup>12</sup>
<b>100Mbps SFP Modules<sup>13</sup></b>	
AT-SPFX/2-90	2 km, 100FX SFP, LC, MMF, 1310 nm, TAA <sup>12</sup>
AT-SPFX30/I-90	30 km, 100FX SFP, LC, SMF, 1310 nm, I-Temp, TAA <sup>12</sup>

<sup>12</sup> Trade Act Agreement compliant (TAA)

<sup>13</sup> IE340L model does not support this feature)