


Datasheet

VSTek VS-SG1041P 4GE POE +1GE UPLINK POE Switch

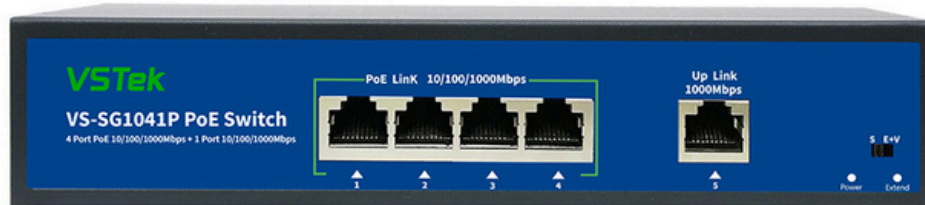

Product Features

- 4*10/100/1000Mbps RJ45 POE port (Support POE+).
- 1*10/100/1000Mbps RJ45 Uplink port.
- 100m Distance / VLAN.
- Whole Power: 78W (52V 1.5A).
- Each port max. power supply reached 30W.
- All port supported by MDI/MDIX auto flip and self-negotiation.
- Support IEEE802.3x flow control for Full-duplex mode and backpressure for Half-duplex mode.
- Supply 4 100/1000Mbps adaptive high speed forwarding data packet non-lost port.
- Automatically detect POE devices and supply the power, won't damage the Non-POE devices.

Application

- Wireless Access Point
- IP Camera
- IP Phone
- Computer Networks

Industry-specific attributes

Product	4 Port Full 1000Mbps POE Switch
Model	VS-SG1041P
POE Port	1 to 4 support IEEE802.3AF/AT Standard
Output Power	15.4W/30W IEEE802.3af/at
Power Pin	Both 1/2+, 3/6- and 4/5+7/8-
Whole Power	≤78W (52V 1.5A)
POE Protocol	IEEE 802.3af/IEEE 802.3at
POE Type	End-span
Transmission Distance	≤100m
Network Standard	IEEE 802.3、 IEEE802.3u、 802.3x
Network Medium	10/100BASE-TX:5 class and above non shielded twisted pair
Switch Capability	12Gbps
Forwarding Mode	Store and forward
Forwarding Rate	10BASE-T: 14880pps/port 100BASE-tx: 148800pps/port 1000BASE-tx: 1488000pps/port
MAC Address	MAC address table 2K
Port Function	Power priority mechanism, fast and forward, MAC automatic learning and aging IEEE802.3X Full-duplex and mode and backpressure for Half-duplex mode
LED Indicator	Each port occupied 1 LINK/ACT.100Mbps, POE Status Indicator, Whole power indicator
Working Environment	Working temperature: -10°-- 55°C
Weight	1kg
Size	200mm*118mm*44mm(L*W*H)