


# Meraki 4/7 dBi Dual-Band Omni Antenna Set (MA-ANT-20)

The Meraki MA-ANT-20 antenna is a multi-band, omni-directional antenna designed for use with Meraki APs that have N-type connectors. It is a versatile antenna and is suitable for a broad range of applications. The MA-ANT-20 is sold in sets of 2.



## Signal Coverage Patterns

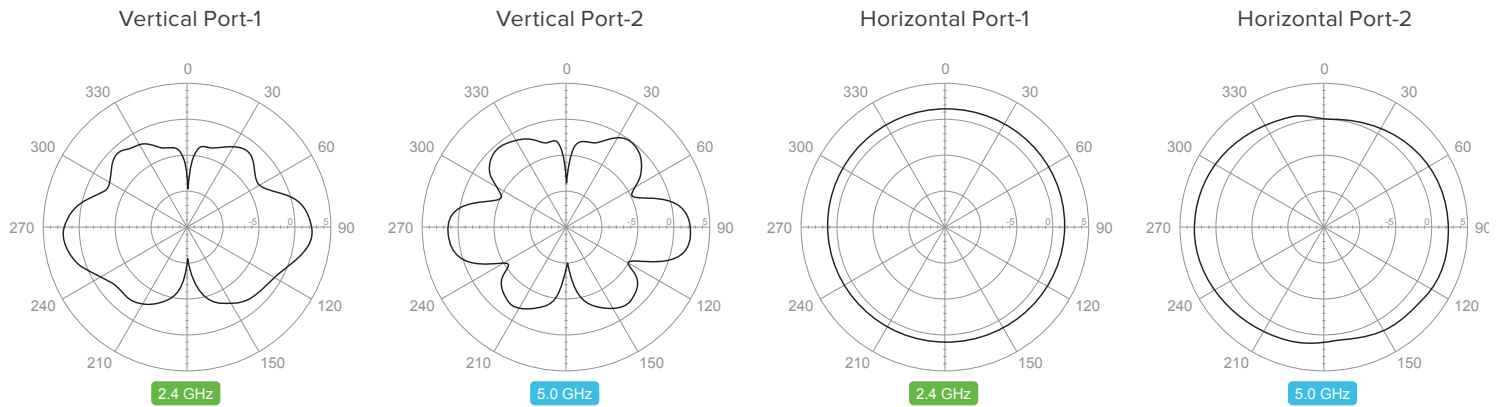

## Specifications

### Electrical

Antenna type: omni-directional  
 Frequency range (2 GHz): 2.400 – 2.500 GHz  
 Frequency range (5 GHz): 5.150 – 5.875 GHz  
 Gain (2 GHz): 4 dBi  
 Gain (5 GHz): 7 dBi  
 Polarization: vertical (linear)  
 Half power beamwidth / horizontal: 360°  
 Half power beamwidth / vertical: 45°

### Box Contents

Two Meraki MA-ANT-20 antennas

### Mounting

Directly to unit (no cable required)

### Physical and Environmental

Dimensions: 1.0 x 7.1" (25 mm x 180 mm)  
 Weight: 0.17 lbs (79 g)  
 Material: ABS plastic  
 Temperature: -40° F – 158° F (-40° C – 70° C)  
 Connector: N-type

### Warranty

1 year hardware warranty included

### Regulatory

Certified for use with the MR62, MR66, MR72, MR74, MR84