


Meraki Dual-Band Patch Antenna, 8 / 6.5 dBi (MA-ANT-25)

The Cisco Meraki MA-ANT-25 patch antenna is a 8 / 6.5 dBi, MIMO, dual-band 2.4 and 5 GHz antenna ideal for providing client coverage over focused areas or creating backhaul links. It is designed for use with Meraki APs that have N-type connectors.



Signal Coverage Pattern

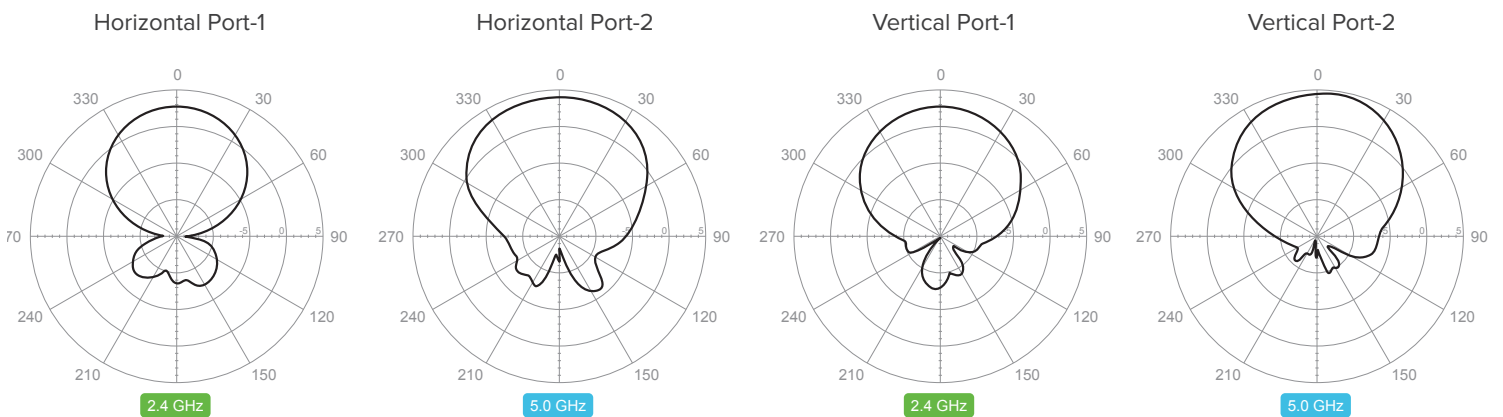

Specifications

Electrical

Antenna type: sector
 Frequency range: 2.400 – 2.500, 5.150 – 5.875 GHz
 Gain: 8 / 6.5 dBi
 Polarization: linear, vertical / horizontal
 Half power beamwidth / horizontal: 60° / 75°

Cables

Cables with two N-type connectors included
 Cable length: 12 inches

Mounting

Mounting hardware and cables included
 Mounts to walls and poles

Physical and Environmental

Dimensions: 7.1 x 7.1 x 1.6" (180 mm x 180 mm x 1.8 mm)
 Weight: 1.1 lbs (512 g)
 Material: UV resistant plastic
 Temperature: -40° F – 158° F (-40° C – 70° C)
 Connector: 2 x N-type

Warranty

1 year hardware warranty included

Regulatory

Certified for use with the MR72, MR74, and MR84